WAAS CH 63133 W09A	APP CRS 088°	Rwy ldg 3599 TDZE 1483 Apt Elev 1483

RNAV (GPS) RWY 9
CASSVILLE MUNI (94K)

RNP APCH - GPS.

NA Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Monett altimeter setting; when not received, use Rogers altimeter setting and increase LPV DA to 1906 feet and visibility ⅛ SM all Cats, LNAV/VNAV DA to 2011 feet and visibility ⅛ SM all Cats; increase all MDAs 20 feet.

MISSED APPROACH: Climb to 3600 direct WURUG and hold.

HFJ AWOS-3	SPRINGFIELD APP CON	CTAF
118.275	124.95 318.2	122.9 L

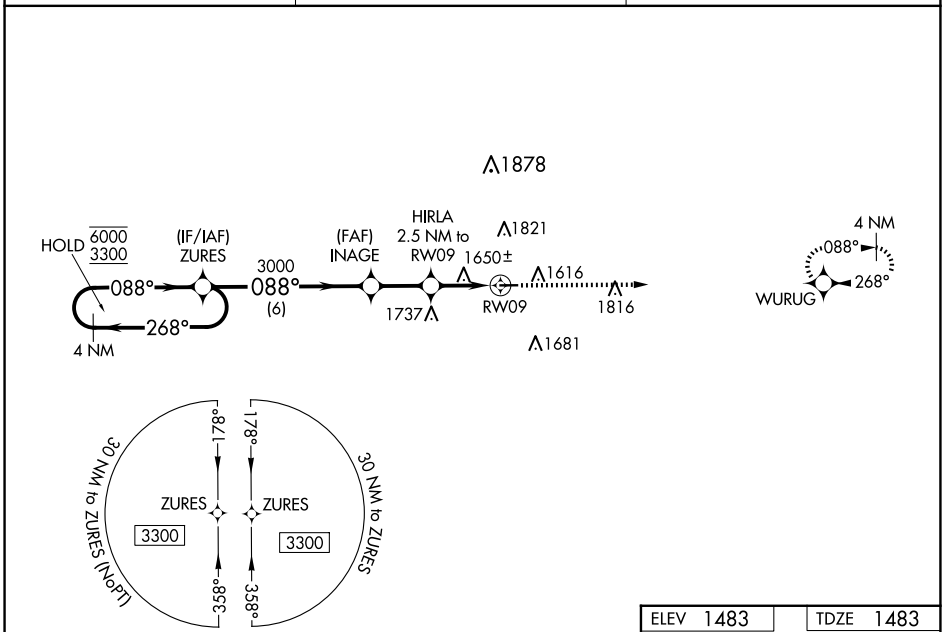

ELEV 1483	TDZE 1483

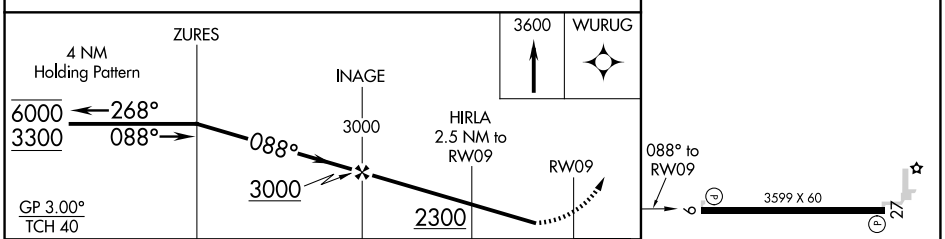

CATEGORY	A	B	C	D
LPV DA	1893-1⅛ 410 (500-1⅛)			NA
LNAV/VNAV DA	1998-1⅜ 515 (600-1⅜)			NA
LNAV MDA	1960-1 477 (500-1)		1960-1⅜ 477 (500-1⅜)	NA
C CIRCLING	2000-1 517 (600-1)	2180-1 697 (700-1)	2180-2 697 (700-2)	NA

MIRL Rwy 9-27 L

NC-3, 25 DEC 2025 to 22 JAN 2026
NC-3, 25 DEC 2025 to 22 JAN 2026