

WAAS  
CH **90327**  
**W32A**

APP CRS  
**315°**

Rwy Idg  
TDZE **665**  
Apt Elev **678**

RNAV (GPS) RWY 32

CHEROKEE COUNTY (JSO)

▼

⚠


Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase DA 118 feet, increase all MDA 120 feet and LPV, LNAV/VNAV visibility all Cats ¼ mile, LNAV and Circling Cat C visibility ⅜ mile. When VGSI inop, Straight-in/Circling Rwy 32 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3100 direct WOSUL and hold.

AWOS-3  
**119.075**

LONGVIEW APP CON★  
**128.75 379.15**

UNICOM  
**122.7 (CTAF) ①**

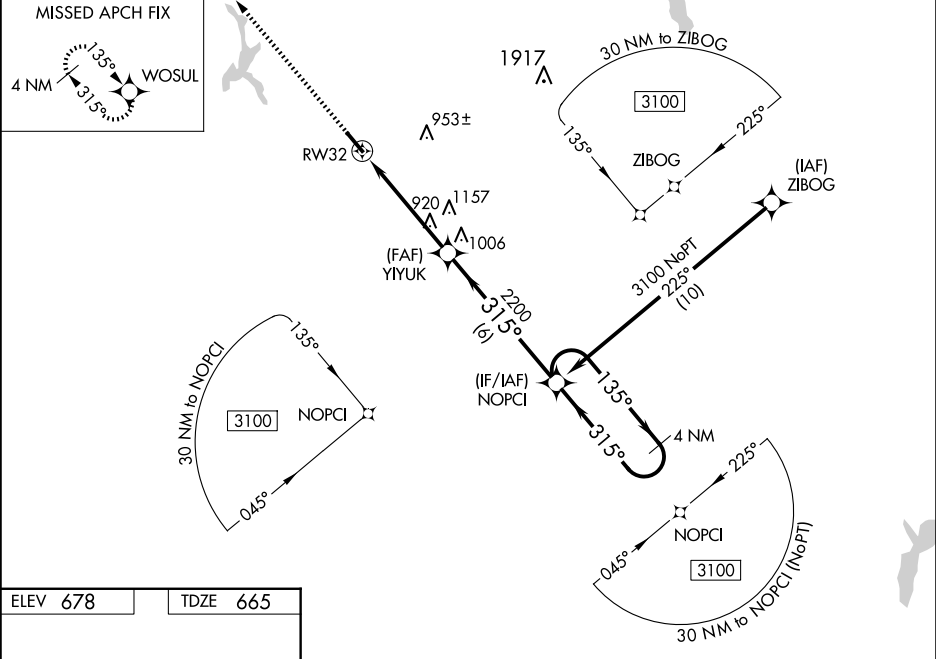

3100

WOSUL

YIYUK

2200

NOPCI

4 NM Holding Pattern

RW32

4.8 NM

6 NM

GP 3.00°

TCH 30

| CATEGORY     | A      | B           | C                       | D  |
|--------------|--------|-------------|-------------------------|----|
| LPV DA       | 915-1  | 250 (300-1) |                         | NA |
| LNAV/VNAV DA | 915-1  | 250 (300-1) |                         | NA |
| LNAV MDA     | 1220-1 | 555 (600-1) | 1220-1½<br>555 (600-1½) | NA |
| CIRCLING     | 1220-1 | 542 (600-1) | 1280-1¾<br>602 (700-1¾) | NA |