

APP CRS
179°

Rwy Idg
TDZE
Apt Elev

4001
620
622

RNAV (GPS) RWY 18

TAYLORVILLE MUNI (T.A.Z.)

▼

▲


DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Springfield altimeter setting and increase all MDA 80 feet, increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2500 direct DAYRE and hold.

AWOS-3PT
123.875

SAINT LOUIS APP CON ★
126.15 323.0

UNICOM
122.8 (CTAF) 0

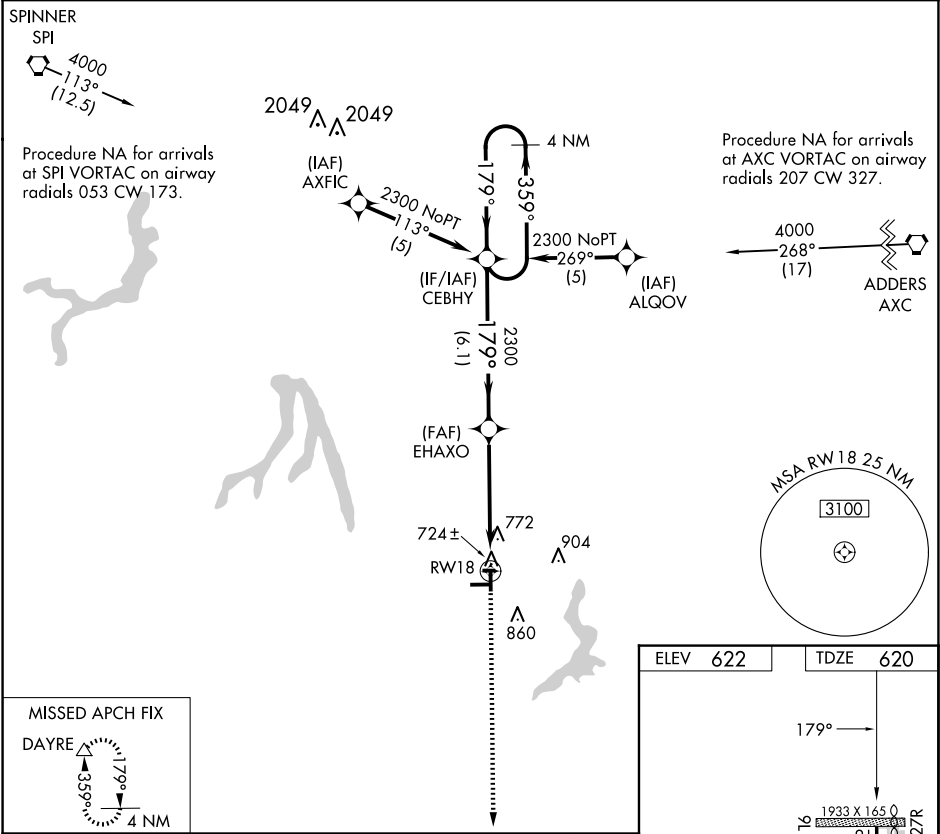

4 NM Holding Pattern

CEBHY

EHAXO

2500 DAYRE

2300

359°

179°

2300

3.05°

TCH 39

6.1 NM

5.1 NM

RW18

CATEGORY	A	B	C	D
LNAV MDA	1080-1	460 (500-1)	1080-1¼ 460 (500-1¼)	NA
CIRCLING	1160-1	538 (600-1)	1260-1¾ 638 (700-1¾)	NA

ELEV 622

TDZE 620

179°

1933 X 1650

81

4001 X 75

122

36

9R

3501 X 60

27R

REIL Rwy 9R, 27L and 18 0

MIRL Rwy 9R-27L and 18-36 0