

WAAS CH 45918 W13A	APP CRS 128°	Rwy Ldg TDZE 661 Apt Elev 663
--	------------------------	---


RNAV (GPS) RWY 13
JIM HOGG COUNTY (HBV)

⚠ Baro-VNAV NA when using Laredo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.


⚠ Visibility reduction by helicopters NA. When local altimeter setting not received, use Laredo altimeter setting: increase LPV DA to 1026 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1089 feet and all visibilities ½ SM; increase all MDAs 120 feet and increase LNAV Cat C and Circling Cat C visibility ¼ SM. VDP NA with Laredo altimeter setting.

MISSED APPROACH: Climb to 3000 direct KATHY and right turn on track 248° to NELEE and hold

AWOS-3PT 118.075	HOUSTON CENTER 127.8 307.2	UNICOM 122.8 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

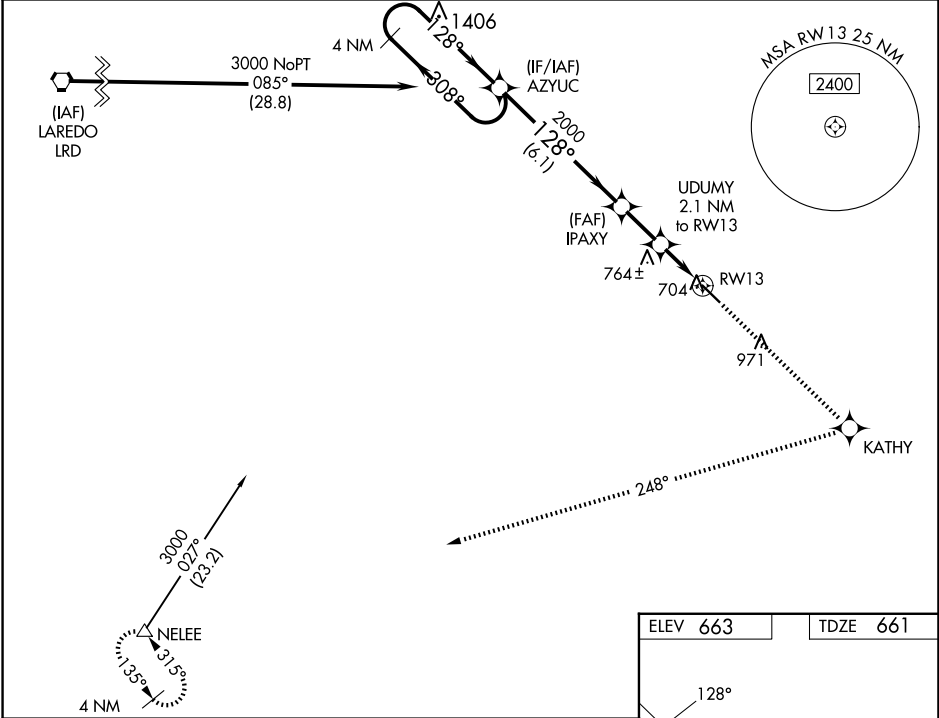

4 NM Holding Pattern		AZYUC		3000	KATHY	NELEE
GP 3.00° TCH 39°		3000	128°	2000	UDUMY 2.1 NM to RW13	*LNAV only
308°		128°	128°	2000	*1 NM to RW13	
6.1 NM		1.9 NM	1.1 NM	1 NM		
CATEGORY	A	B	C	D		
LPV DA	911-1	250 (300-1)		NA		
LNAV/VNAV DA	974-1	313 (400-1)		NA		
LNAV MDA	1020-1	359 (400-1)		NA		
CIRCLING	1040-1 377 (400-1)	1120-1 457 (500-1)	1280-1¾ 617 (700-1¾)	NA		

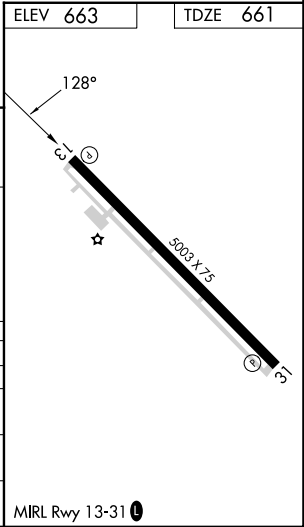

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026