

WAAS CH 93804 W18A	APP CRS 176°	Rwy Idg TDZE Apt Elev	5201 1277 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

WELLINGTON MUNI (E/GT)

RNP APCH - GPS.


▼

▲

Baro-VNAV and VDP NA when using ICT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use ICT altimeter setting: increase LPV DA to 1530 feet; increase LNAV/VNAV DA to 1775 feet; increase all MDAs 60 feet and LNAV Cats C/D visibility 1⁄8 SM and Circling Cat C/D visibility 1⁄4 SM.

MISSED APPROACH: Climb to 3000 direct GOLMN and hold.

AWOS-3P 118.875	WICHITA APP CON 134.85	UNICOM 122.8 (CTAF) 0
---------------------------	----------------------------------	---------------------------------

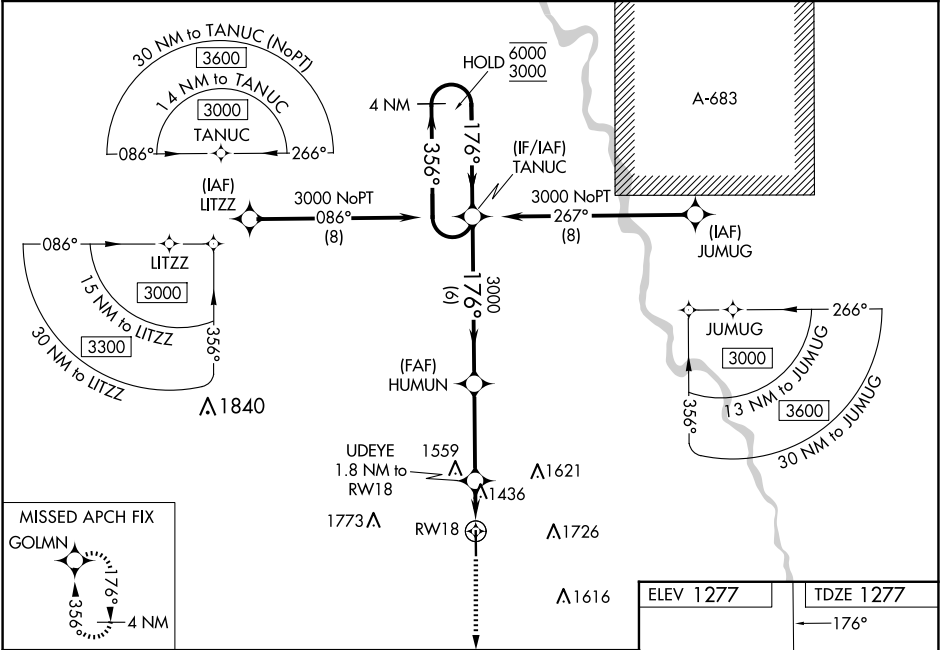

4 NM Holding Pattern		TANUC	HUMUN	UDEYE	GOLMN
6000 ← 356°		176° →	3000	1.8 NM to RW18	3000
3000		176° →	3000	1.2 NM to RW18	RW18
GP 3.00°		6 NM	3.5 NM	0.6 NM	1.2 NM
TCH 42					
CATEGORY	A	B	C	D	
LPV DA	1477-1 200 (200-1)				
LNAV/VNAV DA	1722-1 3⁄8 445 (500-1 3⁄8)				
LNAV MDA	1700-1 423 (500-1)	1700-1 1⁄4 423 (500-1 1⁄4)			
CIRCLING	1760-1 483 (500-1)	2040-2 1⁄4 763 (800-2 1⁄4)	2140-2 3⁄4 863 (900-2 3⁄4)		

ELEV 1277

TDZE 1277

176°

81

100

50

25

36

HIRL Rwy 18-36 0

REIL Rwy 18 and 36 0