

WAAS CH 86503 W09A	APP CRS 090°	Rwy Ldg TDZE 16 Apt Elev 17	6500
--	------------------------	---	-------------

RNAV (GPS) RWY 9

GULF SHORES INTL/JACK EDWARDS FLD (JKA)


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting. Rwy 09 helicopter visibility reduction below ¾ SM NA. Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 388 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 394 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2500 direct
WARLY and hold.

ATIS 134.525	PENSACOLA APP CON 120.65 270.8	GULF SHORES TOWER ★ 118.65 (CTAF) 0	CLNC DEL 121.7	CLNC DEL 124.55 (When twr clsd)	GND CON 121.7	UNICOM 122.7
------------------------	--	--	--------------------------	---	-------------------------	------------------------

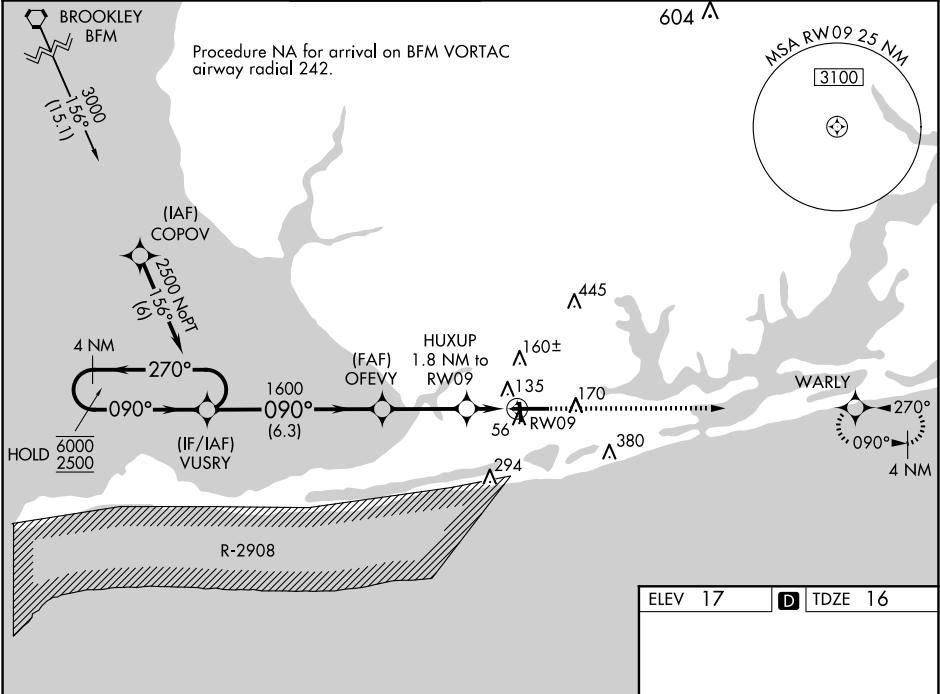

4 NM Holding Pattern		VUSRY		OFEVY		HUXUP		RWY 09	
6000 2500		270° 090°		1600		1.8 NM to RWY 09		1.1 NM to RWY 09	
GP 3.00° TCH 50		090°		1600		620		RWY 09	
		6.3 NM		3 NM		0.8 NM		1.1 NM	
CATEGORY		A	B		C		D		
LPV DA			310-7/8		294 (300-7/8)				
LNAV/VNAV DA			316-7/8		300 (300-7/8)				
LNAV MDA		400-1	384 (400-1)		400-1 1/8	384 (400-1 1/8)			
CLIRCLING		480-1	463 (500-1)		740-2 723 (800-2)	740-2 1/4 723 (800-2 1/4)			

ELEV 17 TDZE 16

2500 WARLY

090°

6962 X 100

3596 X 720

35

MRL Rwy 17-35

HIRL Rwy 9-27

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026