


RNP APCH.

When local altimeter setting not received, use Wheeling altimeter setting and increase all MDA 60 feet. Rwy 24 helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH: Climb to 3000 direct MEHIF and hold.

AWOS-3 119.05	CLEVELAND CENTER 126.95 239.30	UNICOM 122.7 (CTAF) 0
------------------	-----------------------------------	--------------------------

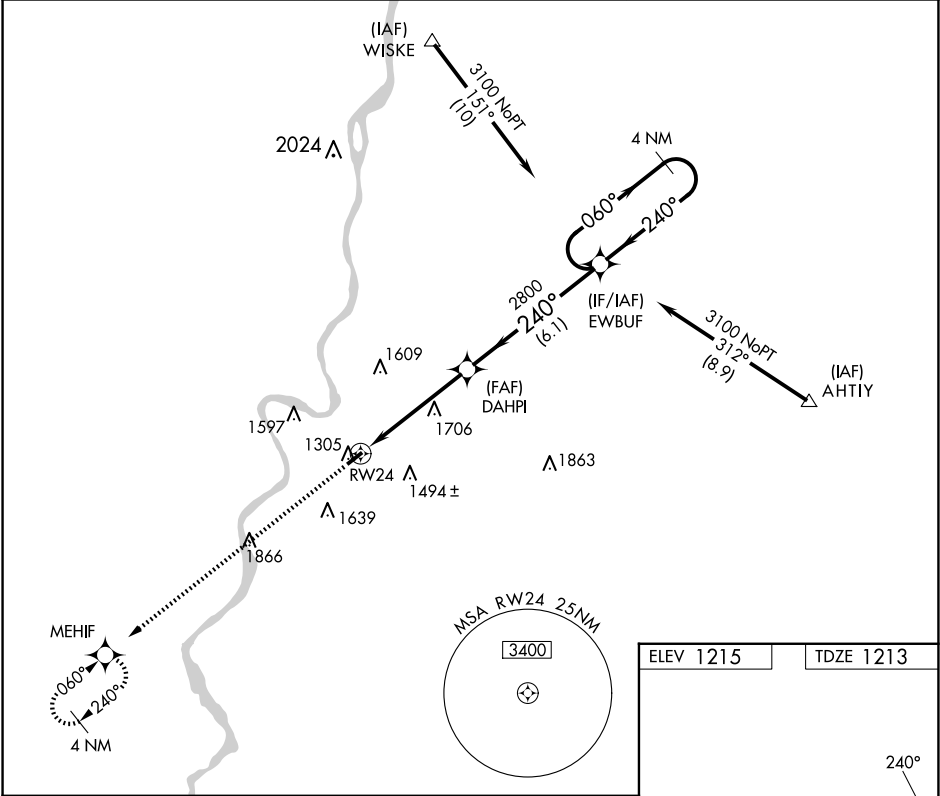

3000

MEHIF

↑

✦

EWBUF

4 NM Holding Pattern

DAHPI

2800

RW24

↙

3.04°

TCH 40

240°

060°

240°

3100

4.9 NM

6.1 NM

CATEGORY	A	B	C	D
LNVA MDA	1960-1 747 (800-1)	1960-1¼ 747 (800-1¼)	1960-2¼ 747 (800-2¼)	NA
CIRCLING	1960-1 745 (800-1)	1960-1¼ 745 (800-1¼)	1960-2¼ 745 (800-2¼)	NA

MIRL Rwy 6-24 0

✦

✦

3301 X 60

0.6% UP