
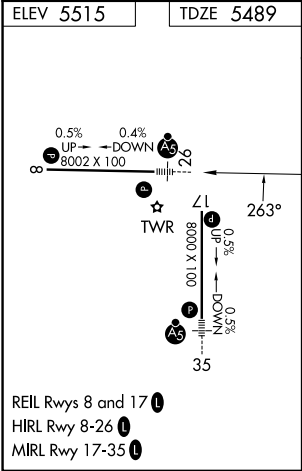


LOC/DME I-FTG	APP CRS	Rwy Ldg	8002
109.3	263°	TDZE	5489
Chan 30		Apt Elev	5515

ILS or LOC RWY 26
COLORADO AIR AND SPACE PORT (CFO)

DME required.		MALSR	MISSED APPROACH: Climb to 6100 then climbing left turn to 7200 on heading 080° and on FQF VORTAC R-045 to SKIPI/I-FTG 7 DME and hold.		
▼	For inop ALS, increase S-LOC 26 Cat C/D visibility to 1 1/8 SM. Autopilot coupled approach NA below 6250 MSL.				
ATIS	DENVER APP CON	SPACE PORT TOWER ★	GND CON	CLNC DEL	CLNC DEL
119.025	128.25 371.95	120.2 (CTAF) 1	124.7	124.7	121.75 (When twr closed)
				UNICOM	
				122.95	

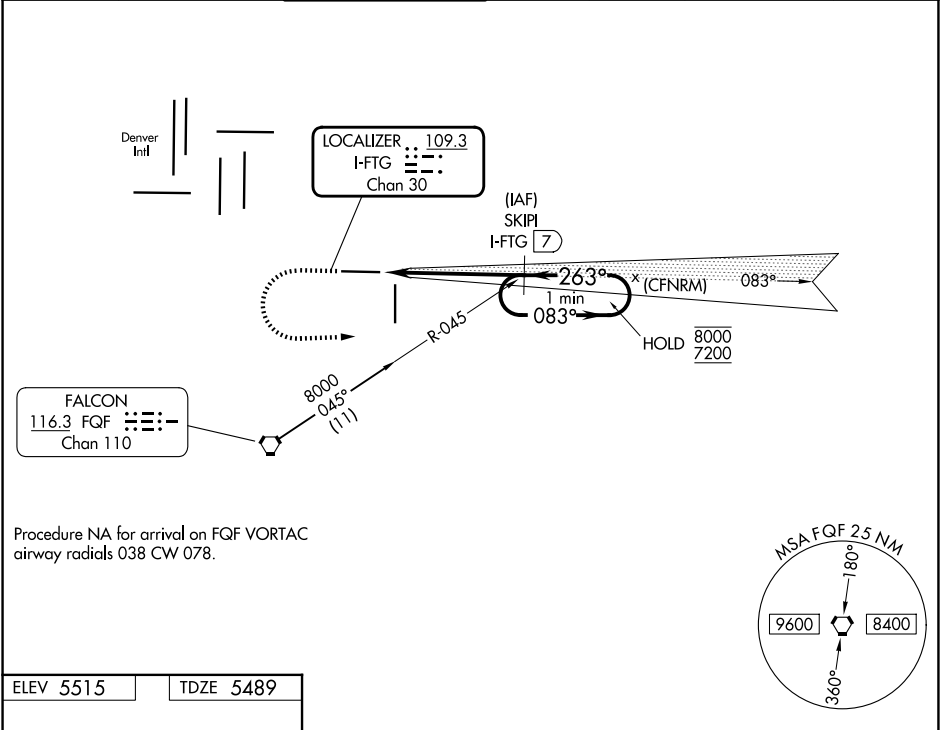

6100	7200	FQF R-045	SKIPI I-FTG 7	SKIPI I-FTG 7	One Minute Holding Pattern
*LOC only					
*I-FTG 2.9					
I-FTG 1.7					
GS 3.00° TCH 50					
CATEGORY	A	B	C	D	
S-ILS 26	5689-1/2 200 (200-1/2)				
S-LOC 26	5900-1/2 411 (400-1/2)		5900-3/4 411 (400-3/4)		
CIRCLING	6000-1 485 (500-1)		6100-1 1/2 585 (600-1/2)	6300-2 1/2 785 (800-2 1/2)	