


WAAS CH 53643 W18A	APP CRS 175°	Rwy Idg TDZE Apt Elev	4001 854 870
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

JONES MEML (3F7)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct DASTE and hold.
▼ NA Rwy 18 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Cushing altimeter setting.	

CUH AWOS-3 118.25	KANSAS CITY CENTER 127.8 319.1	CTAF 122.9 0
-----------------------------	--	------------------------

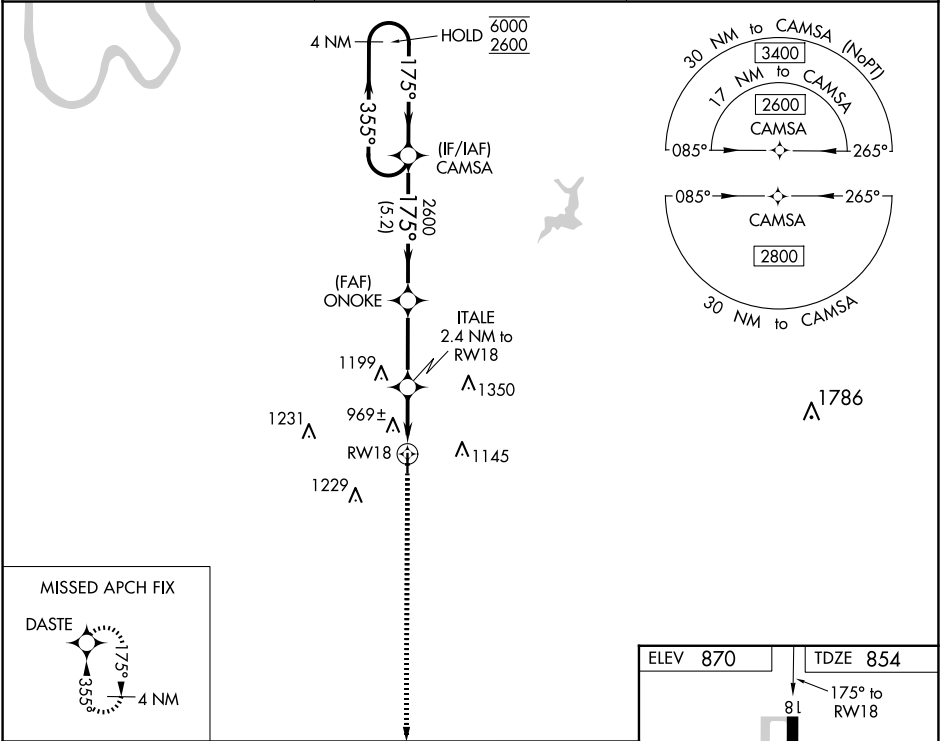

4 NM Holding Pattern		CAMSA	ONOKE	ITALIE	RWY 18	2600	DASTE
6000 ← 355°		175° →	2600	2.4 NM to RWY 18			
GP 3.00°		175° →	2600	*1600			
TCH 40		5.2 NM	3.1 NM	2.4 NM			
CATEGORY	A	B	C	D			
LPV DA	1156-1	302 (300-1)		NA			
LNAV/VNAV DA	1191-1	337 (400-1)		NA			
LNAV MDA	1280-1	426 (500-1)	1280-1¼ 426 (500-1¼)	NA			
CIRCLING	1380-1 510 (600-1)	1500-1 630 (700-1)	1600-2 730 (800-2)	NA			

ELEV 870

TDZE 854

8L

175° to RWY 18

1.6° UP

4001 X 75

36

MIRL Rwy 18-36 0