

LOC I-JZW 110.95	APP CRS 357°	Rwy Idg TDZE Apt Elev	6002 697 700
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36L
FORT WORTH SPINKS (FWS)

RADAR required for procedure entry.



NA

Circling NA west of Rwy 18R-36L. For inop ALS increase S-LOC 36L Cat C/D visibility to 1¼ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing left turn to 3100 on heading 269° and FUZ VORTAC R-222 to SLUGG INT/ FUZ 37.5 DME and hold.

ATIS 120.025	LONE STAR APP CON 135.975 379.9	SPINKS TOWER ★ 124.625 (CTAF) 0	GND CON 119.475	UNICOM 122.7
------------------------	---	--	---------------------------	------------------------

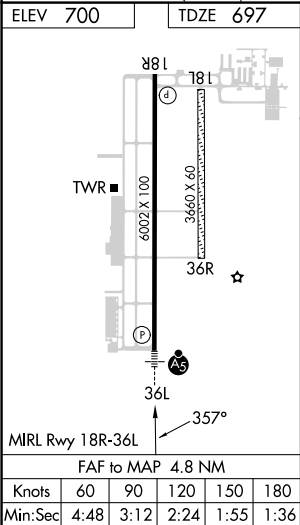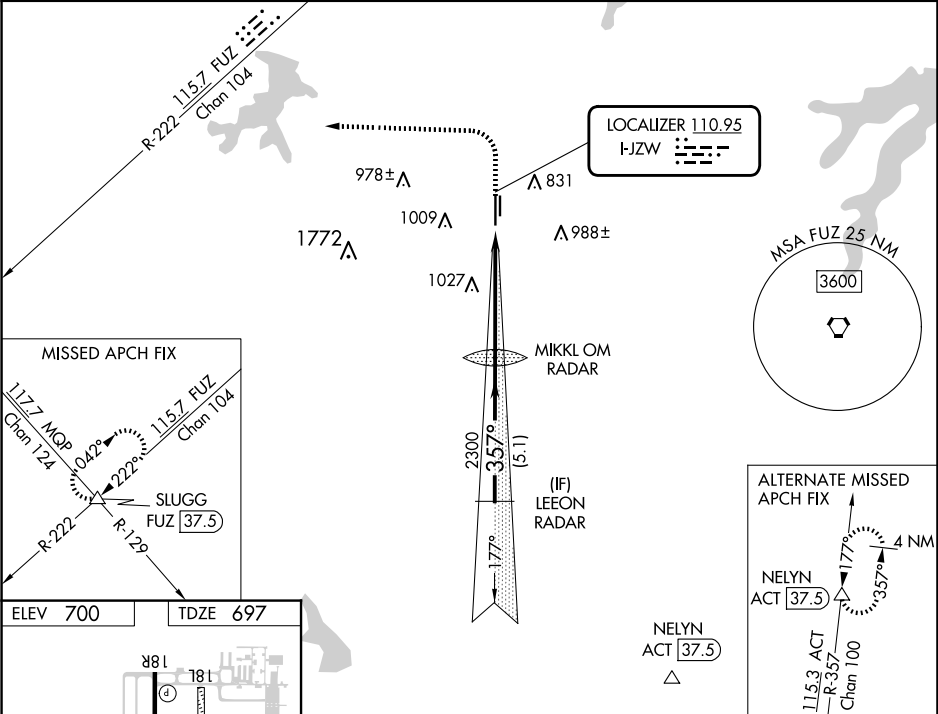

	1800	3100	FUZ R-222	SLUGG				
		hdg 269°		△				
					MIKKL OM RADAR		LEEON RADAR	
					2278			
						357°	2300	
						2300		GS 3.00° TCH 50
						4.8 NM	5.1 NM	
CATEGORY	A	B	C	D				
S-ILS 36L	897-½ 200 (200-½)							
S-LOC 36L	1320-½ 623 (700-½)		1320-1⅓ 623 (700-1⅓)					
CIRCLING	1320-1 620 (700-1)		1340-1¾ 640 (700-1¾)		1340-2 640 (700-2)			