


WAAS CH 53714 W16A	APP CRS 159°	Rwy Idg TDZE Apt Elev	3900 2160 2160
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16


PIONEER VILLAGE FLD (ØV3)

NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.	MISSED APPROACH: Climb to 3700 direct MEDOC and hold.
---	---

EAR AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.7 (CTAF) Ø
--------------------------------	--	---------------------------------

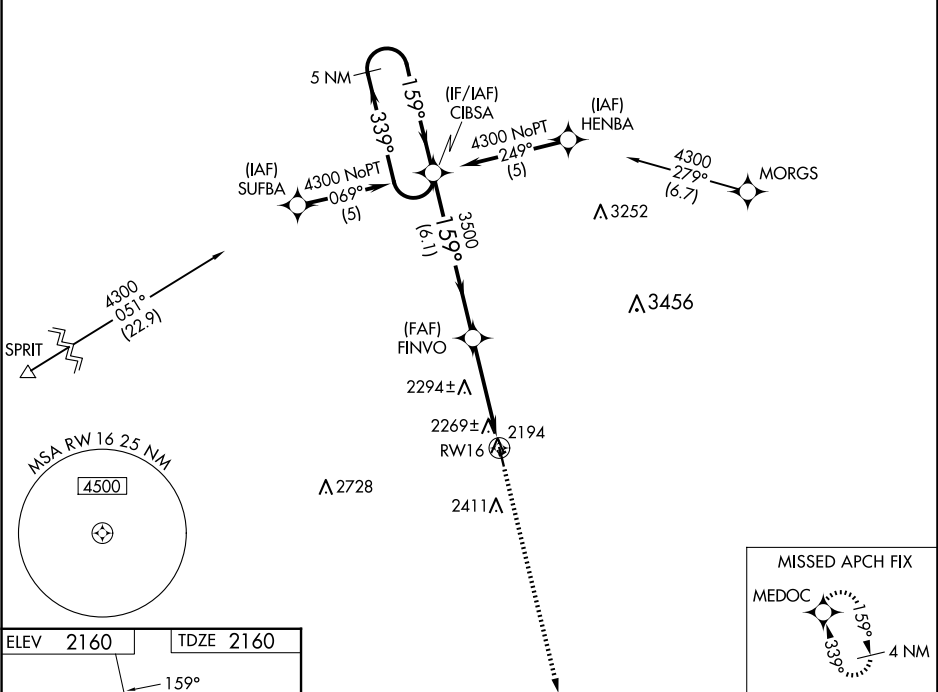

ELEV 2160	TDZE 2160
------------------	------------------

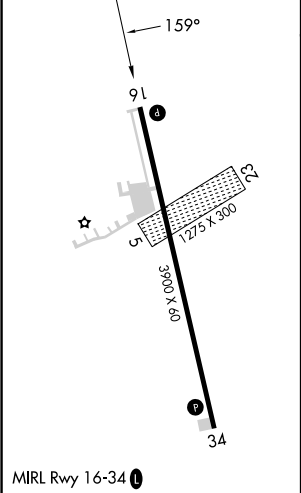

5 NM Holding Pattern

4300

GP 3.00° TCH 40

CIBSA

FINVO

RW16

3700

MEDOC

←339°

159°→

159°

3500

6.1 NM

4.1 NM

CATEGORY	A	B	C	D
LPV DA	2445-1	285 (300-1)	NA	
LNAV/VNAV DA	2574-1½	414 (500-1½)	NA	
LNAV MDA	2580-1	420 (500-1)	NA	
 CIRCLING	2680-1 520 (600-1)	2780-1 620 (700-1)	NA	