
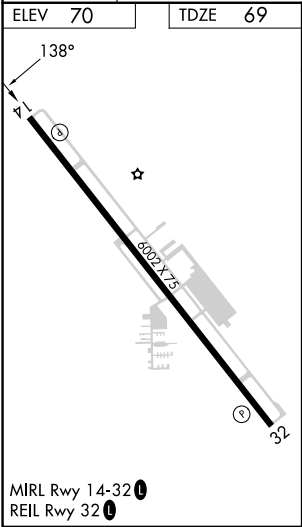


|                                        |                        |                             |                                       |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>70341</b><br><b>W14A</b> | APP CRS<br><b>138°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6002</b><br><b>69</b><br><b>70</b> |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 14  
MID VALLEY (TXW)

|                                                                                                                                       |                                       |                                                                                       |                               |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|-------------------------------|
| RNP APCH.                                                                                                                             |                                       | MISSED APPROACH: Climb to 900 then climbing right turn to 2100 direct WODEE and hold. |                               |
| Rwy 14 helicopter visibility reduction below ¾ SM NA.<br>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. |                                       |                                                                                       |                               |
| AWOS-3PT<br><b>118.575</b>                                                                                                            | VALLEY APP CON<br><b>126.55 377.2</b> | CLNC DEL<br><b>125.95</b>                                                             | UNICOM<br><b>122.8 (CTAF)</b> |

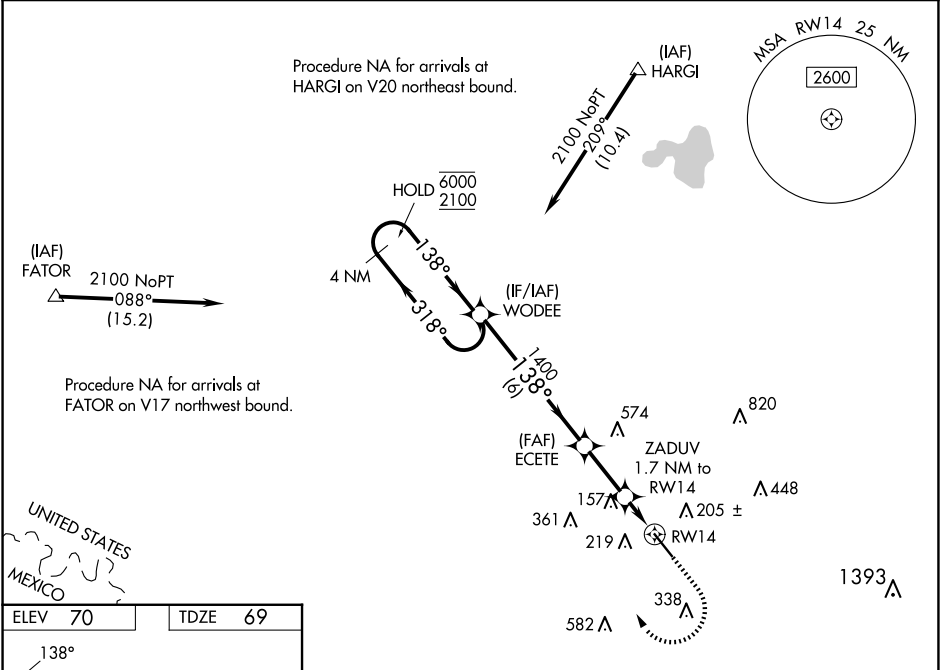

|                      |                   |              |                        |                            |             |
|----------------------|-------------------|--------------|------------------------|----------------------------|-------------|
| 4 NM Holding Pattern |                   | WODEE        | 900                    | 2100                       | WODEE       |
| 6000<br>2100         |                   | 318°<br>138° | 1400                   | ZADUV<br>1.7 NM to<br>RW14 | *LNAV only. |
| GP 3.00°<br>TCH 50   |                   | 1400         | *660                   | *0.9 NM to<br>RW14         | RW14        |
|                      |                   | 6 NM         | 2.3 NM                 | 0.8 NM                     | 0.9 NM      |
| CATEGORY             | A                 | B            | C                      | D                          |             |
| LPV DA               | 319-¾ 250 (300-¾) |              |                        |                            |             |
| LNAV/VNAV DA         | 331-⅞ 262 (300-⅞) |              |                        |                            |             |
| LNAV MDA             | 420-1 351 (400-1) |              |                        |                            |             |
| CIRCLING             | 620-1             | 550 (600-1)  | 700-1¾<br>630 (700-1¾) | 940-2¾<br>870 (900-2¾)     |             |