


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>53614</b><br><b>W30A</b> | APP CRS<br><b>303°</b> | Rwy Idg <b>4105</b><br>TDZE <b>1147</b><br>Apt Elev <b>1147</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 30


HAROLD DAVIDSON FLD (VMR)

|           |                                                 |                                                       |
|-----------|-------------------------------------------------|-------------------------------------------------------|
| RNP APCH. |                                                 | MISSED APPROACH: Climb to 3500 direct WAPIR and hold. |
| NA        | Baro-VNAV NA.<br>Use Yankton altimeter setting. |                                                       |

|                          |                               |                                           |                                  |
|--------------------------|-------------------------------|-------------------------------------------|----------------------------------|
| AWOS-3P<br><b>118.65</b> | YKN AWOS-3PT<br><b>119.05</b> | SIOUX CITY APP CON★<br><b>124.6 307.0</b> | AUNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-------------------------------|-------------------------------------------|----------------------------------|

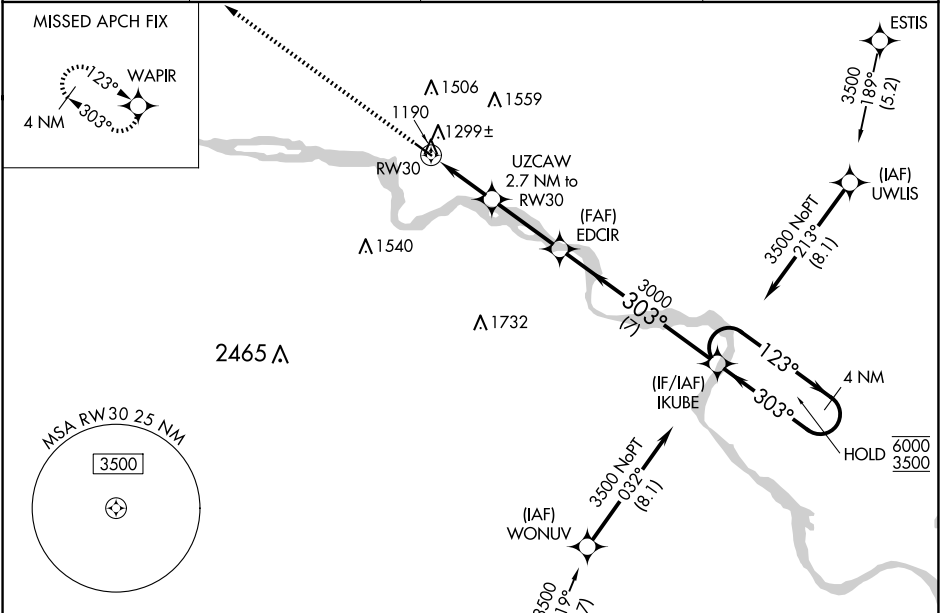

|           |           |
|-----------|-----------|
| ELEV 1147 | TDZE 1147 |
|-----------|-----------|

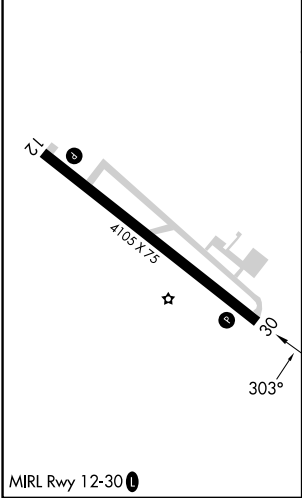

|                            |                    |                            |                         |    |
|----------------------------|--------------------|----------------------------|-------------------------|----|
| 3500<br>↑<br>WAPIR         |                    | 4 NM<br>Holding Pattern    |                         |    |
| * LNAV only                |                    | 123° → 6000<br>← 303° 3500 |                         |    |
| UZCAW<br>2.7 NM to<br>RW30 |                    | EDCIR<br>3000              |                         |    |
| RW30                       |                    | IKUBE                      |                         |    |
| 2040*                      |                    | 3000                       |                         |    |
| 2.7 NM                     |                    | 7 NM                       |                         |    |
| 3 NM                       |                    | GP 3.00°<br>TCH 38         |                         |    |
| CATEGORY                   | A                  | B                          | C                       | D  |
| LPV DA                     | 1470-1 323 (400-1) |                            |                         | NA |
| LNAV/<br>VNAV DA           | 1487-1 340 (400-1) |                            |                         | NA |
| LNAV MDA                   | 1580-1             | 433 (500-1)                | 1580-1¼<br>433 (500-1¼) | NA |
| CIRCLING                   | 1760-1             | 613 (700-1)                | 1900-2¼<br>753 (800-2¼) | NA |