

WAAS CH 53607 W31A	APP CRS 308°	Rwy Idg 3901 TDZE 933 Apt Elev 933
--	------------------------	---

RNAV (GPS) RWY 31


CASSELTON ROBERT MILLER RGNL (5N8)

RNP APCH.


T Use Fargo altimeter setting; when not received, use Moorhead altimeter
A NA setting and increase all MDA 20 feet. Baro-VNAV NA.

MISSED APPROACH: Climb to 3000
direct WUSCO and hold.

FAR ASOS 124.5 379.2	FARGO APP CON 120.4 377.15	UNICOM 122.8 (CTAF) 0
--------------------------------	--------------------------------------	--

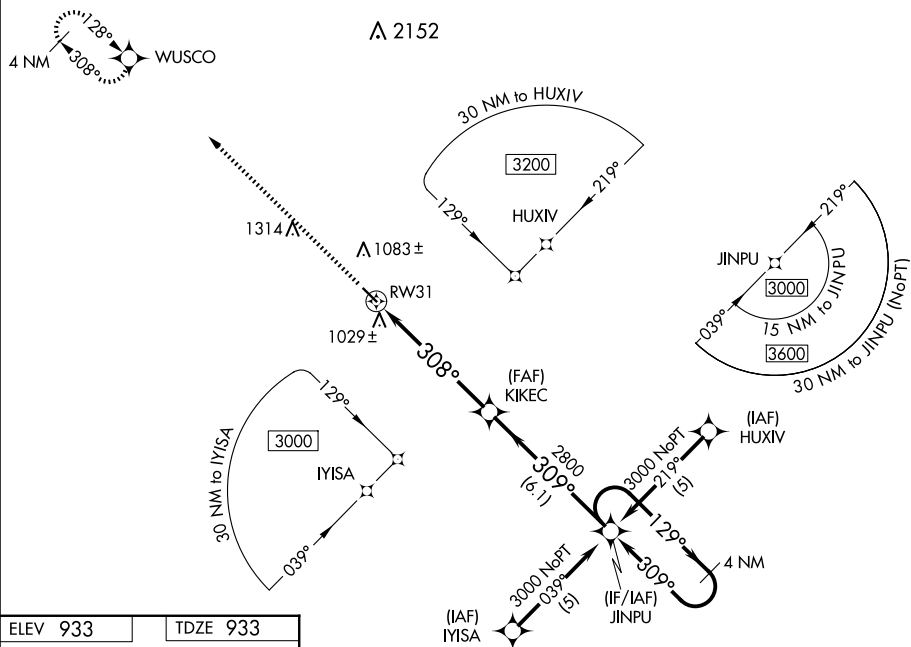


ELEV 933		TDZE 933
----------	--	----------



3000	WUSCO
	

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 22).

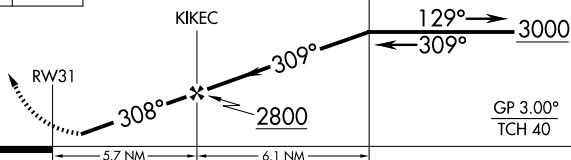4 NM
Holding Pattern

CATEGORY	A	B	C	D
LPV DA	1226-1 293 (300-1)			NA
LNAV/ VNAV DA	1370-1½ 437 (500-1½)			NA
LNAV MDA	1420-1 487 (500-1)		1420-1¼ 487 (500-1¼)	NA
CIRCLING	1480-1 547 (600-1)	1520-1 587 (600-1)	1620-2 687 (700-2)	NA

REIL Rwy 31 L

MIRL Rwy 13-31 **L**

CASSELTON, NORTH DAKOTA

Amdt 1B 17JUN21

CASSELTON ROBERT MILLER RGNL (5N8)

46°51'N-97°12'W

RNAV (GPS) RWY 31