


|                                        |                        |                             |                                     |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|
| WAAS<br>CH <b>45834</b><br><b>W09A</b> | APP CRS<br><b>095°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4557</b><br><b>9</b><br><b>9</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|

RNAV (GPS) RWY 9

CRYSTAL RIVER/DAVIS FLD (CGC)

|                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <div><div>▼</div><div>▲</div></div> <div>Procedure NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ocala altimeter setting and increase all MDA 80 feet; increase LP Cat C/D visibility <math>\frac{3}{8}</math> mile, LNAV Cat C/D visibility <math>\frac{1}{4}</math> mile and Circling Cat C/D visibility <math>\frac{1}{4}</math> mile. Helicopter visibility reduction below 1 SM NA.</div> | MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct LEYZU and hold. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|

|                          |                                             |                                   |
|--------------------------|---------------------------------------------|-----------------------------------|
| AWOS-3<br><b>118.325</b> | JACKSONVILLE APP CON<br><b>118.6 251.15</b> | UNICOM<br><b>122.725 (CTAF) 0</b> |
|--------------------------|---------------------------------------------|-----------------------------------|

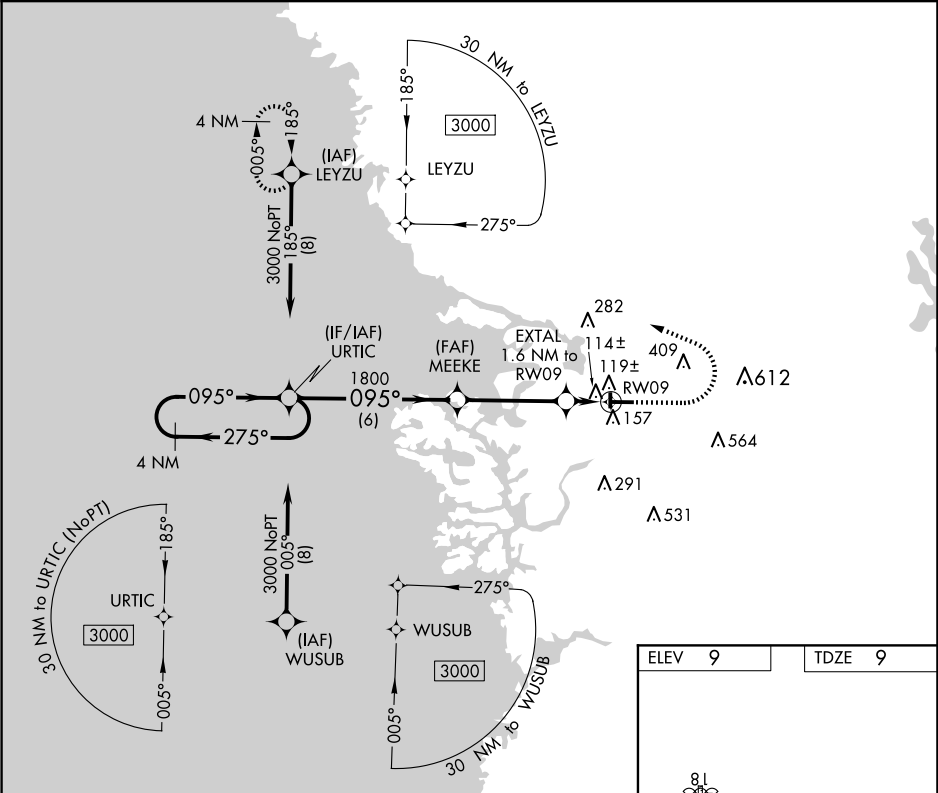

|                      |             |        |              |                      |      |
|----------------------|-------------|--------|--------------|----------------------|------|
| 4 NM Holding Pattern |             | URTIC  | MEEKE        | EXTAL 1.6 NM to RW09 | RW09 |
| 3000                 |             | 275°   | 095°         | 3.00°                | 560  |
| 6 NM                 |             | 3.9 NM | 1.6 NM       |                      |      |
| CATEGORY             | A           | B      | C            | D                    |      |
| LP MDA               | 380-1       |        | 371 (400-1)  |                      |      |
| LNAV MDA             | 420-1       |        | 411 (500-1)  |                      |      |
| CIRCLING             | 460-1       |        | 540-1        |                      |      |
|                      | 451 (500-1) |        | 751 (800-2¼) |                      |      |
|                      | 540-1       |        | 760-2¼       |                      |      |
|                      | 531 (600-1) |        | 871 (900-2¾) |                      |      |
|                      | 460-1       |        | 540-1        |                      |      |
|                      | 451 (500-1) |        | 751 (800-2¼) |                      |      |
|                      | 540-1       |        | 760-2¼       |                      |      |
|                      | 531 (600-1) |        | 871 (900-2¾) |                      |      |