

WAAS CH 48828 W23A	APP CRS 230°	Rwy Idg 5000 TDZE 65 Apt Elev 65
--	------------------------	---

RNAV (GPS) RWY 23

MARION COUNTY (X35)

RNP APCH - GPS.



▼

▲ NA

Rwy 23 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase LPV DA to 424 feet; increase LNAV/VNAV DA to 579 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM. Circling Rwy 5, 10, 28 NA at night.

MISSED APPROACH: Climb to 3000 direct ALICS and hold, continue climb-in-hold to 3000.

OCF AWOS-3PT 128.125	JACKSONVILLE APP CON 118.6 251.15	UNICOM 122.8 (CTAF) 0
--------------------------------	---	---------------------------------

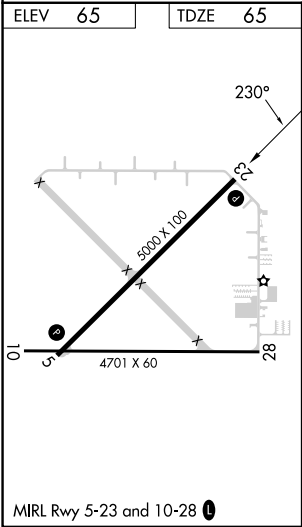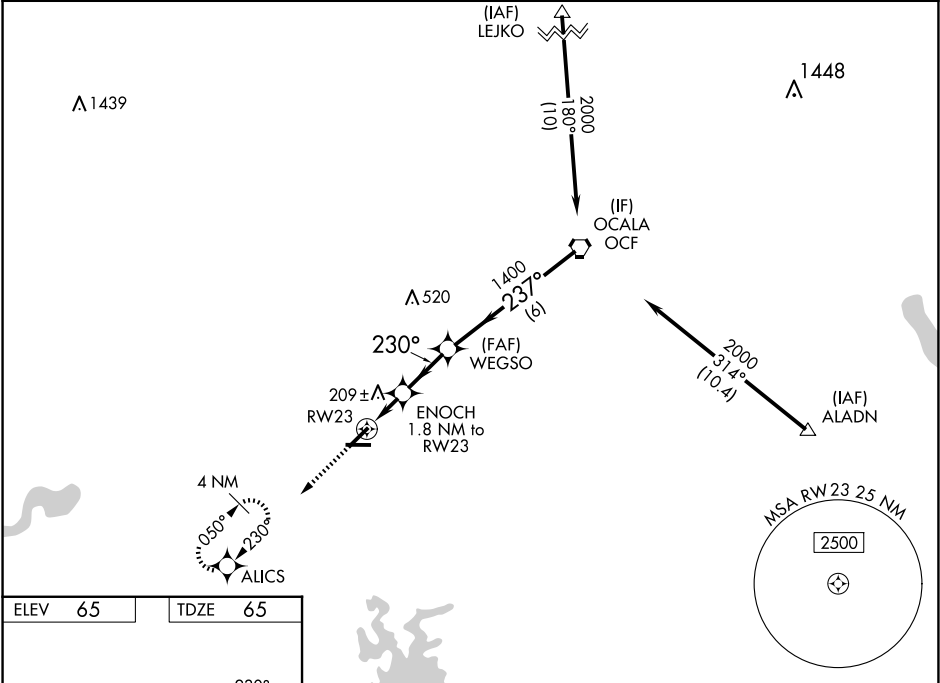

3000 ↑		ALICS ✦		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 27).		OCF VORTAC			
RW23		ENOC 1.8 NM to RW23		WEGSO 1400		2000			
1.8 NM		2.3 NM		6 NM		GP 3.00° TCH 40			
CATEGORY		A		B		C		D	
LPV DA		374-1		309 (400-1)					
LNAV/ VNAV DA		529-1½		464 (500-1½)					
LNAV MDA		540-1		475 (500-1)		540-1½		475 (500-1½)	
CIRCLING		540-1		475 (500-1)		580-1½ 515 (600-1½)		760-2¼ 695 (700-2¼)	