

WAAS CH 42737 W27A	APP CRS 271°	Rwy Ldg TDZE Apt Elev	5001 733 738
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility $\frac{1}{8}$ mile and LNAV and Circling Cats C/D visibility $\frac{1}{4}$ mile. Baro-VNAV and VDP NA when using Champaign Urbana altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 3000 direct
LEVI and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) 0
--------------------------	---	--

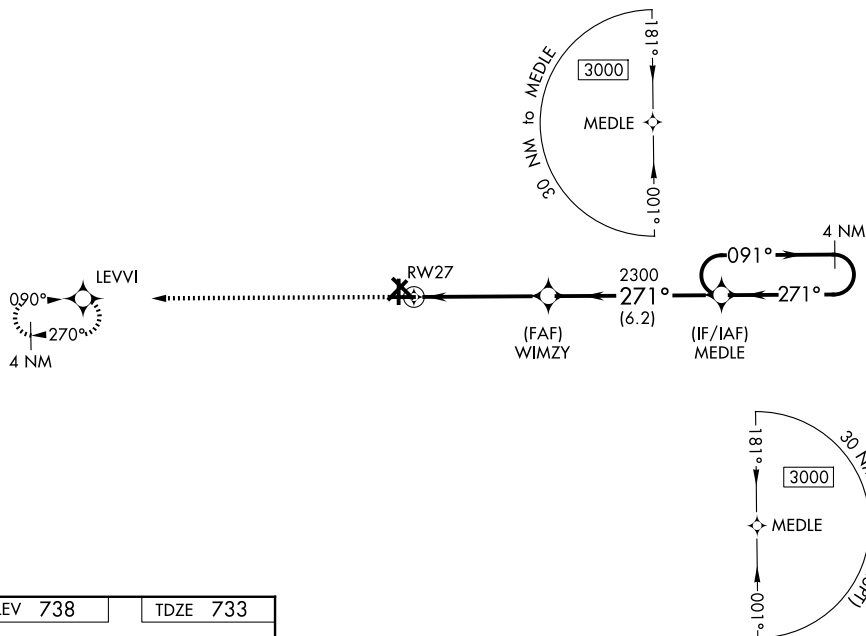

ELEV 738		TDZE 733
----------	--	----------

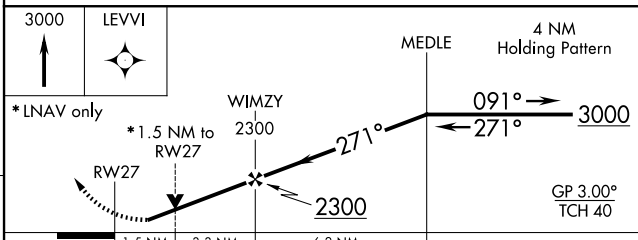

		A	B	C	D
CATEGORY					
LPV DA		983-1 250 (300-1)			
LNAV/ VNAV DA		1029-1 296 (300-1)			
LNAV MDA		1240-1 507 (600-1)		1240-1 $\frac{3}{8}$ 507 (600-1 $\frac{3}{8}$)	
CIRCLING		1240-1 502 (600-1)	1280-1 542 (600-1)	1380-1 $\frac{3}{4}$ 642 (700-1 $\frac{3}{4}$)	1420-2 $\frac{1}{4}$ 682 (700-2 $\frac{1}{4}$)

RNAV (GPS) RWY 27