

WAAS CH 45926 W03A	APP CRS 027°	Rwy Ldg TDZE 530 Apt Elev 537
--	------------------------	---

RNAV (GPS) RWY 3

OHIO COUNTY (JQD)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV and LNAV/VNAV DA to 851 feet. Increase all MDA 80 feet and LNAV Cat C visibility 3⁄8 SM and Circling Cat C visibility 1⁄4 SM. Circling Rwy 21 NA at night. Rwy 3 helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 2500 direct ZUTJO and hold.

AWOS-3PT 132.1	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

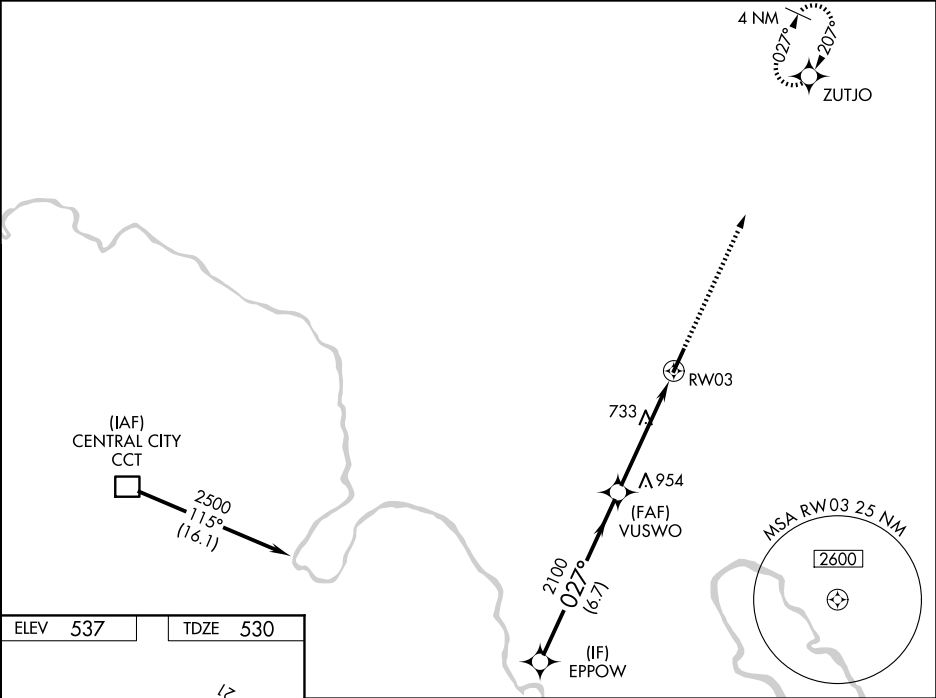

ELEV 537

TDZE 530

MIRL Rwy 3-21

REIL Rwys 3 and 21

EPPOW				
VUSWO				
RWY 03				
GP 3.00° TCH 40				
2500 027° 2100 1.5 NM to RWY 03				
6.7 NM 3.3 NM 1.5 NM				
CATEGORY	A	B	C	D
LPV DA	780-1	250 (300-1)		NA
LNAV/VNAV DA	780-1	250 (300-1)		NA
LNAV MDA	1040-1	510 (600-1)	1040-1 3⁄8 510 (600-1 3⁄8)	NA
CIRCLING	1040-1 503 (600-1)	1100-1 563 (600-1)	1300-2 1⁄4 763 (800-2 1⁄4)	NA

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026