

WAAS CH 42822 W24A	APP CRS 247°	Rwy Ldg TDZE 665 Apt Elev 665
--	------------------------	---

RNAV (GPS) RWY 24


SANDUSKY COUNTY RGNL (S24)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using TOL altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. When local altimeter setting not received, use TOL altimeter setting: increase LPV DA to 978 feet and all visibilities $\frac{3}{8}$ SM; increase LNAV/VNAV DA to 1196 feet and all visibilities $\frac{3}{8}$ SM; increase all MDA 100 feet and LNAV visibility Cat C and D $\frac{1}{4}$ SM and Circling visibility Cat C and D $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 3000 direct
ZUFIL and hold.

AWOS-3P 119.575	TOLEDO APP CON 126.1 307.0	UNICOM 123.05 (CTAF) 0
---------------------------	--------------------------------------	----------------------------------

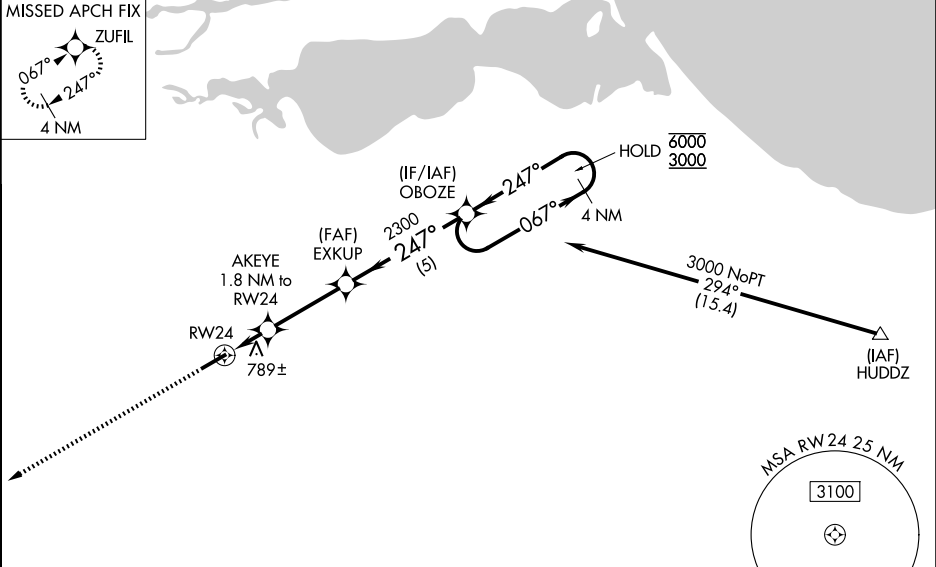

ELEV 665

TDZE 665

247°
5500 X 100
RW24
AKEYE
1.8 NM to RW24
EXKUP
2300
OBOZE
Holding Pattern
4 NM
067°
247°
6000
3000
GP 3.00°
TCH 42

3000	ZUFIL	4 NM
------	-------	------

1.1 NM

0.7 NM

3.2 NM

5 NM

1260

2300

CATEGORY	A	B	C	D
LPV DA	885- $\frac{3}{4}$		220 (300- $\frac{3}{4}$)	
LNAV/VNAV DA	1103-1 $\frac{1}{2}$		438 (500-1 $\frac{1}{2}$)	
LNAV MDA	1040-1	375 (400-1)	1040-1 $\frac{1}{8}$	375 (400-1 $\frac{1}{8}$)
CIRCLING	1120-1 455 (500-1)	1160-1 495 (500-1)	1380-2 715 (800-2)	1380-2 $\frac{1}{4}$ 715 (800-2 $\frac{1}{4}$)