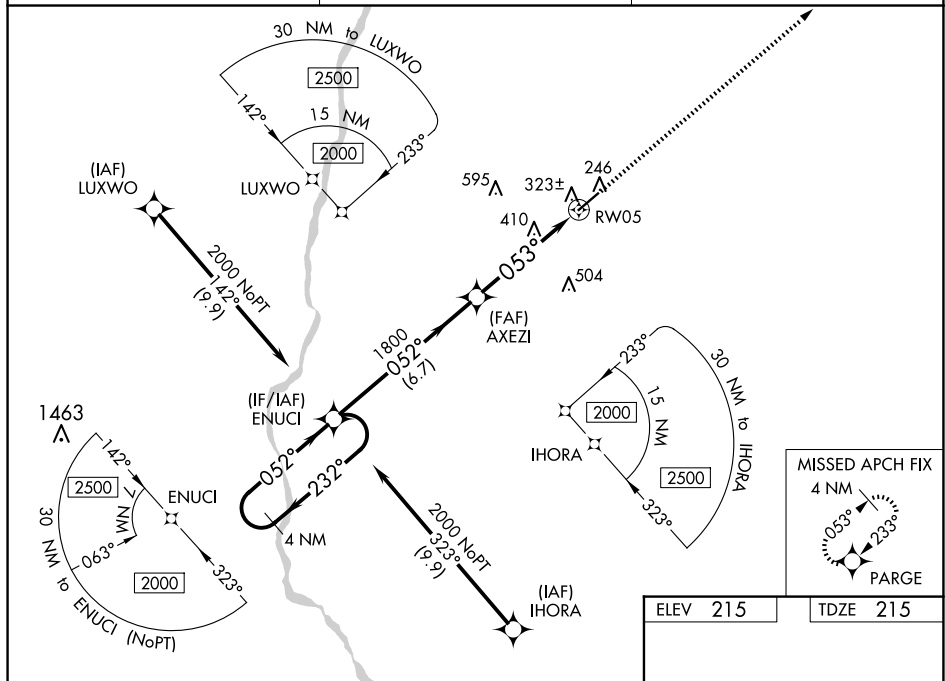


RNAV (GPS) RWY 5

EARLY COUNTY (BIJ)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
▲ Rwy 5 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Bainbridge altimeter setting. When local altimeter setting not received, use Bainbridge altimeter setting and increase LPV DA to 605 feet and all visibilities ⅓ SM. Increase LNAV/VNAV DA to 657 feet and all visibilities ⅓ SM. Increase all MDA 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
PARGE and hold.

CTAF
122.9 **0**

4 NM Holding Pattern

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 34).

3000

PARGE

2000 ← 232°

052° →

ENUCI

AXEZI

1800

052°

053°

*1.5 NM to RW05

RW05

*LNAV only


GP 3.00° TCH 59

6.7 NM

3.3 NM

1.5 NM

CATEGORY		A		B		C		D	
LPV	DA			528-1		313 (400-1)			
LNAV/ VNAV	DA			580-1		365 (400-1)			
LNAV	MDA	740-1	525 (600-1)			740-1½		525 (600-1½)	
CIRCLING		740-1	525 (600-1)			860-1¾ 645 (700-1¾)		960-2½ 745 (800-2½)	

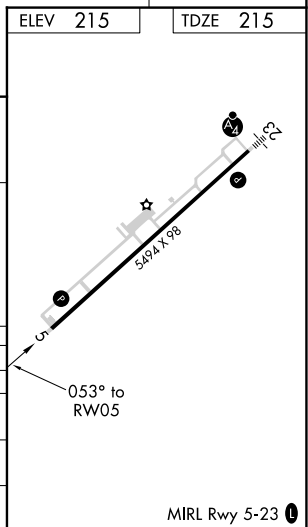

RNAV (GPS) RWY 5

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026