
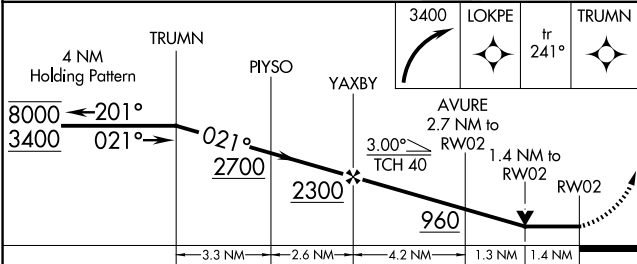


|                                        |                        |                                                 |
|----------------------------------------|------------------------|-------------------------------------------------|
| WAAS<br>CH <b>57947</b><br><b>W02A</b> | APP CRS<br><b>021°</b> | Rwy Idg<br>TDZE <b>74</b><br>Apt Elev <b>75</b> |
|----------------------------------------|------------------------|-------------------------------------------------|


RNAV (GPS) RWY 2  
HOLY CROSS (HCA) (PAHC)

|                               |                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS.<br>⚠<br>-28°C | Circling Rwy 20 NA at night. Circling NA west of Rwy 2-20. Rwy 2 helicopter visibility reduction below ¾ SM NA. VDP NA when using Anvik altimeter setting. When local altimeter setting not received, use Anvik altimeter setting and increase all MDAs 120 feet and LNAV visibility Cat B, C and D ½ SM, and LP visibility Cat C and D ¾ SM, and Circling all visibilities ½ SM. | MISSED APPROACH: Climbing right turn to 3400 direct LOKPE and on track 241° to TRUMN and hold, continue climb-in-hold to 3400. |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|

|                           |                                          |                              |                        |
|---------------------------|------------------------------------------|------------------------------|------------------------|
| AWOS-3P<br><b>118.325</b> | ANCHORAGE CENTER<br><b>118.15 251.05</b> | KENAI RADIO<br><b>122.45</b> | CTAF<br><b>122.8 0</b> |
|---------------------------|------------------------------------------|------------------------------|------------------------|

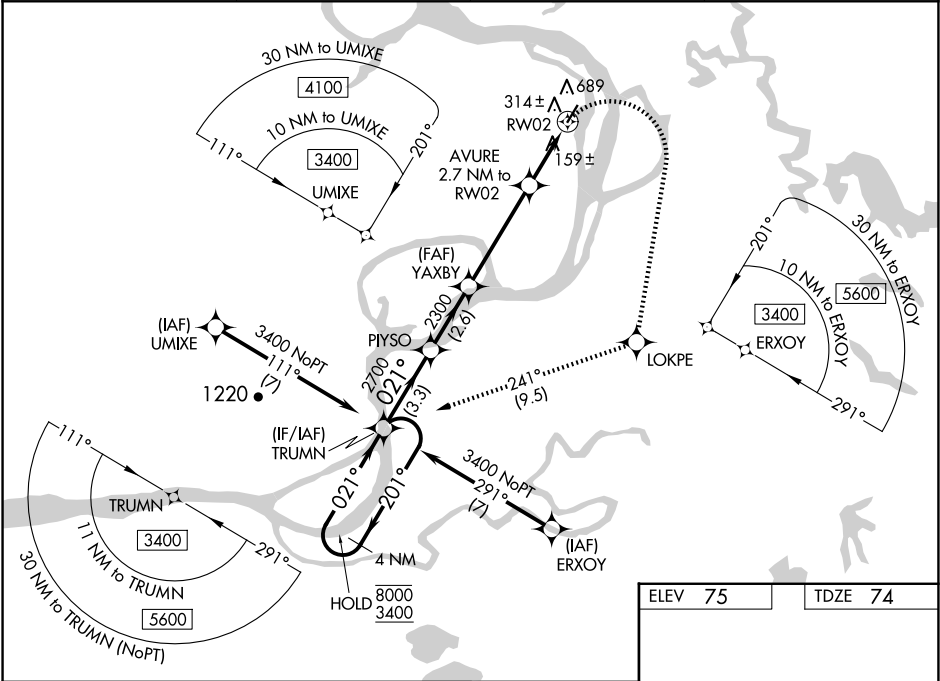

| CATEGORY | A     | B           | C                    | D                            |
|----------|-------|-------------|----------------------|------------------------------|
| LP MDA   | 560-1 | 486 (500-1) | 560-1 3/8            | 486 (500-1 3/8)              |
| LNAV MDA | 800-1 | 726 (800-1) | 800-2                | 726 (800-2)                  |
| CIRCLING | 800-1 | 725 (800-1) | 800-2<br>725 (800-2) | 800-2 1/4<br>725 (800-2 1/4) |

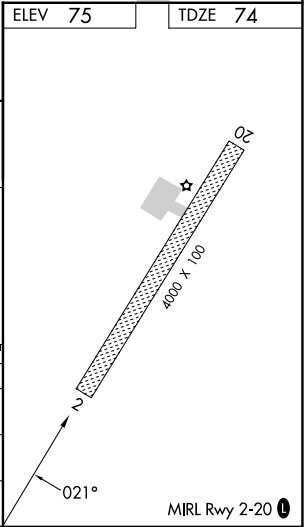

AK, 27 NOV 2025 to 22 JAN 2026

AK, 27 NOV 2025 to 22 JAN 2026