

WAAS CH 86831 W27A	APP CRS 266°	Rwy Ldg 4712 TDZE 6037 Apt Elev 6056
--	------------------------	---

RNAV (GPS) RWY 27
SPANISH PEAKS AIRFIELD (4V1)

SPANISH PEAKS AIRFIELD (4V1)

T
A NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Trinidad altimeter setting and increase all DA 119 feet and all MDA 120 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅜ mile. Baro-VNAV and VDP NA when using Trinidad altimeter setting.

MISSED APPROACH: Climb to 6800 then climbing right turn to 9400 direct JUKEX and hold.

AWOS-3PT


123.6

DENVER CENTER

128.375 379.95

UNICOM

122.8 (CTAF) L

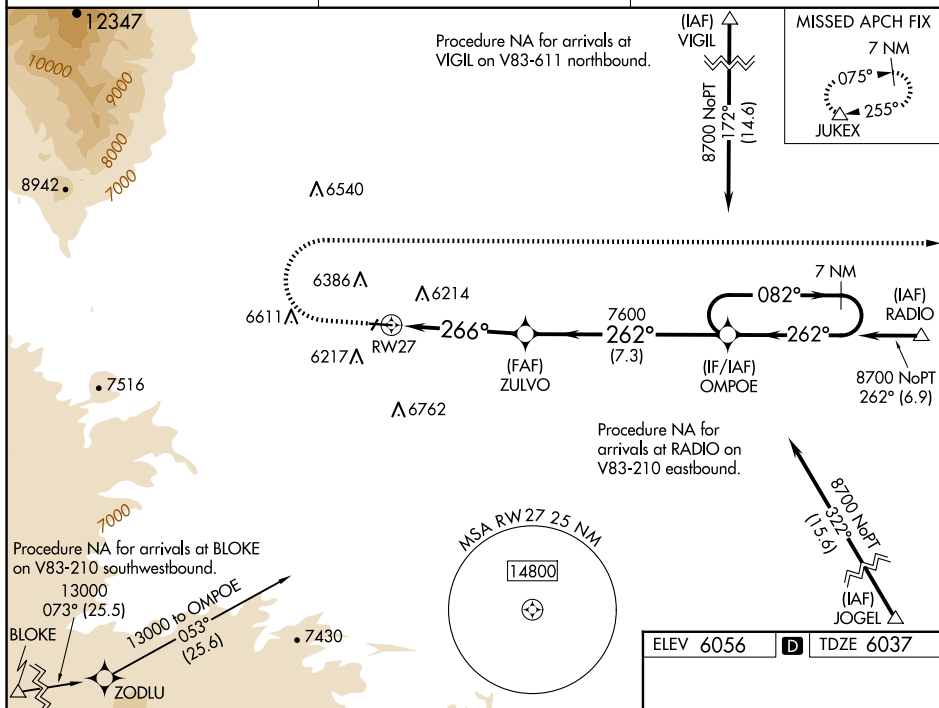

6800 ↑	9400 ↷	JUKE △
-----------	-----------	-----------

*LNAV only

1.4 NM to RW27

RW27

1.4 NM

3.4 NM

7.3 NM

ZULVO

7600

266°

262°

OMPOE

7 NM Holding Pattern

082°

262°

8700


7600

GP 3.00°
TCH 45

CATEGORY	A	B	C	D
LPV DA	6287-1 250 (300-1)			
LNAV/ VNAV DA	6525-1 $\frac{3}{8}$ 488 (500-1 $\frac{3}{8}$)			
LNAV MDA	6520-1 483 (500-1)		6520-1 $\frac{3}{8}$ 483 (500-1 $\frac{3}{8}$)	
 CIRCLING	6720-1 664 (700-1)		7080-3 1024 (1100-3)	7120-3 1064 (1100-3)

ELEV 6056	D	TDZE 6037
-----------	----------	-----------

TDZE 6037

MIRL Rwy 9-27

RNAV (GPS) RWY 27