

APP CRS	Rwy Idg	3000
122°	TDZE	13
	Apt Elev	18


RNAV (GPS) RWY 12

KIVALINA (KVL)(PAVL)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Noatak altimeter setting and increase all MDAs 340 feet and LNAV Cat C visibility 1 SM and Circling Cat B visibility ¼ SM, Cat C 1 ¼ SM.

MISSED APPROACH: Climb to 3000 direct DINEC and hold.

ASOS	WTK/PAWN AWOS-3P	ANCHORAGE CENTER	KOTZEBUE RADIO	UNICOM
135.8	135.75	119.2 263.0	122.55	122.8 (CTAF) 0

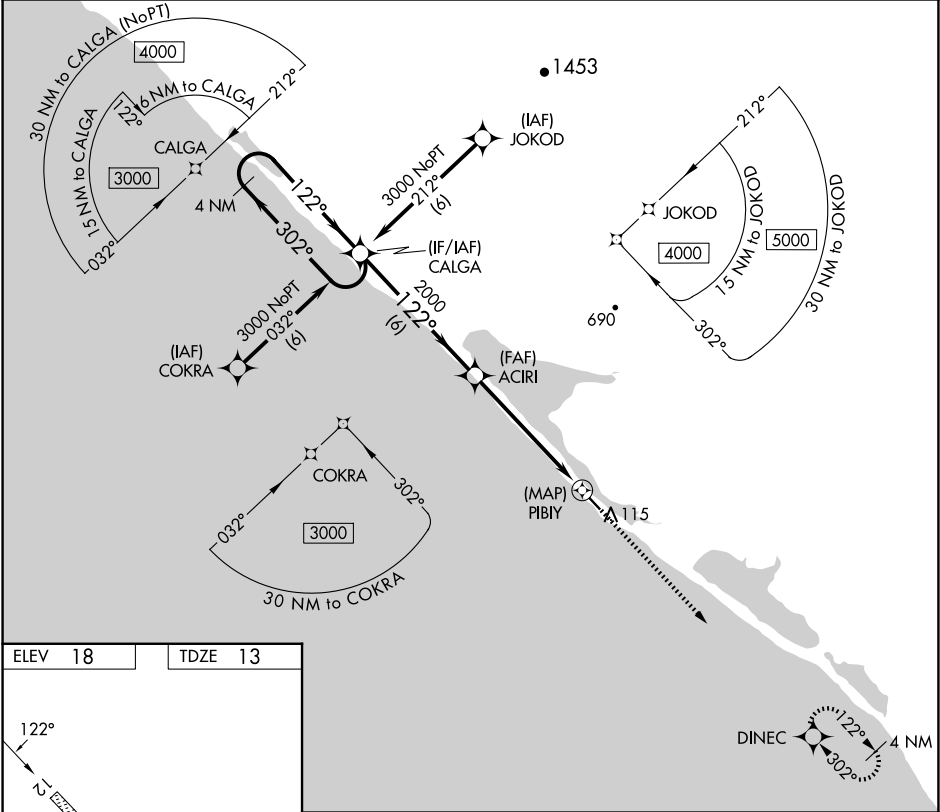

ELEV 18

TDZE 13

MIRL Rwy 12-30 0

4 NM Holding Pattern				3000	DINEC
3000 ← 302° → 122°				↑	✧
CALGA				ACIRI	PIBIY
2000				3.06° TCH 40	
6 NM				5.6 NM	0.4
CATEGORY	A	B	C	D	
LNAV MDA	340-1 327 (400-1)				NA
CIRCLING	440-1 422 (500-1)	560-1 542 (600-1)	560-1½ 542 (600-1½)		NA