

APP CRS
348°

Rwy Ldg
TDZE
Apt Elev

6004
360
364

RNAV (GPS) RWY 35

MOUNT PLEASANT RGNL (OSA)

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ½ mile all Cats, LNAV visibilities ¼ mile all Cats and circling visibilities ¼ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 317.75	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

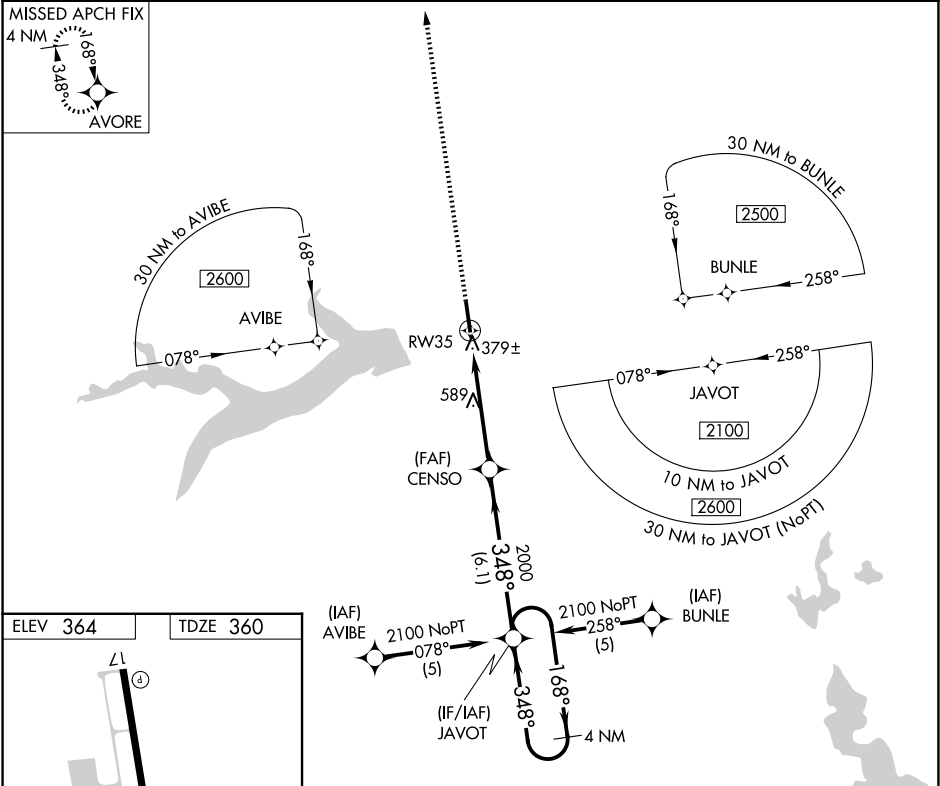


Diagram illustrating the RWY 35 approach procedure, showing the 348° approach path, obstacles (AVORE, CENSO, JAVOT), and the 4 NM Holding Pattern.

Obstacle Data:

Obstacle	Altitude (ft)	Distance from RWY 35 (NM)
AVORE	2000	1.6
CENSO	2000	3.4
JAVOT	2100	6.1

Approach Path Data:

Category	A	B	C	D
LNAV/VNAV DA	700-1¼	340 (400-1¼)		
LNAV MDA	900-1 540 (600-1)	900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)	900-2 540 (600-2)
CIRCLING	900-1 536 (600-1)	1040-2 676 (700-2)	1040-2½ 676 (700-2½)	1040-3 676 (700-3)