

WAAS CH 78341 W16A	APP CRS 159°	Rwy Idg 3102 TDZE 541 Apt Elev 541
--	------------------------	---

RNAV (GPS) RWY 16

HOBBY FLD (77S)

RNP APCH.


▼

▲NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 34 NA at night. When local altimeter setting not received, use Eugene altimeter setting and increase LPV DA to 1102 feet and all LPV visibilities ¼ SM, and increase LNAV/VNAV DA to 1474; increase all MDAs 80 feet. Baro-VNAV and VDP NA when using Eugene altimeter setting. Rwy 16 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 6000 direct CURTI and hold, continue climb-in-hold to 6000.

AWOS-3 119.275	CASCADE APP CON ★ 119.6	UNICOM 122.7 (CTAF) 0
--------------------------	-----------------------------------	--

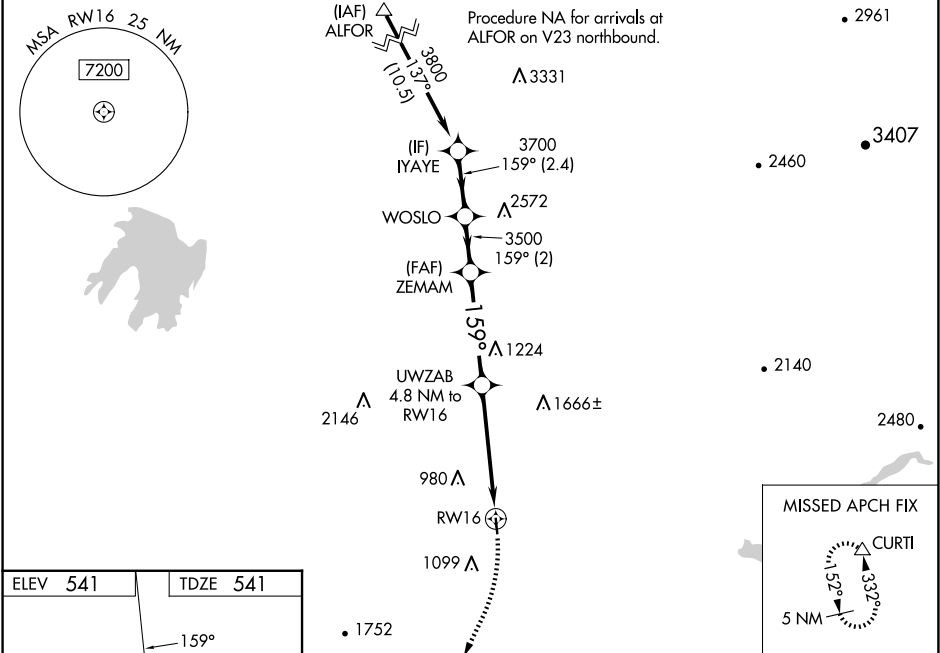

ELEV 541

TDZE 541

MIRL Rwy 16-34 **0**

REIL Rws 16 and 34

VGSI and RNAV glidepath not coincident (VGSI Angle 3.60/TCH 26).					6000	CURTI
					* LNAV only.	
					RW16	
					* 4 NM to RW16	
					*2160	
					GP 3.10° TCH 40	
					2.4 NM 2 NM 4.1 NM 0.8 NM 4 NM	
CATEGORY	A		B		C	D
LPV DA	1041-1⅜ 500 (500-1⅜)					
LNAV/ VNAV DA	1413-2½ 872 (900-2½)					
LNAV MDA	1820-1¼ 1279 (1300-1¼)	1820-1½ 1279 (1300-1½)	1820-3 1279 (1300-3)			
CIRCLING	1820-1¼ 1279 (1300-1¼)	1820-1½ 1279 (1300-1½)	2260-3 1719 (1800-3)	2740-3 2199 (2200-3)		