

25331

RNAV (GPS) RWY 25


BOB BAKER MEML (IAN) (PAIK)

  -28°C

Circling NA north of Rwy 7-25. Circling Rwy 7 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. Baro-VNAV and VDP NA when using WLK/PASK altimeter setting. When local altimeter setting not received, use WLK/PASK altimeter setting and increase LPV DA* to 531 feet; increase LPV DA to 720 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 888 feet and all visibilities ¼ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 900 then climbing left turn to 4000 direct KOBXU and hold, continue climb-in-hold to 4000.
*Missed approach requires minimum climb of 335 feet per NM to 1440.

AWOS-3P 119.025	ANCHORAGE CENTER 119.2 263.0	CTAF 122.7
--------------------	---------------------------------	---------------

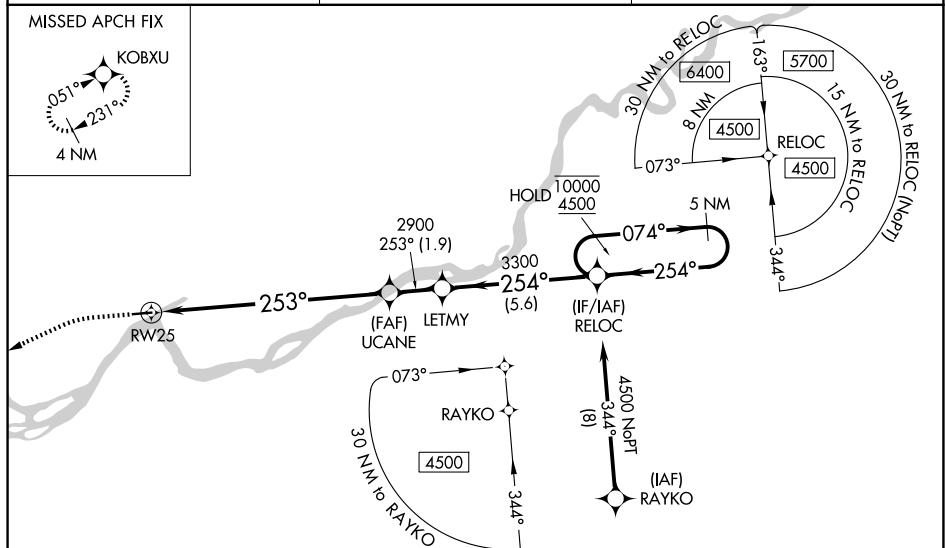

ELEV 179
TDZE 175

900 ↑

4000 ↶

KOBXU ✪

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 29).

LETMY

UCANE

2900

4.9 NM to RW25

253°

254°

074°

10000

4500

GP 3.00°

TCH 35

5 NM Holding Pattern

RELOC

253°

254°

3300

2900

4.9 NM

3.7 NM

1.9 NM

5.6 NM

CATEGORY		A	B	C	D
LPV	DA*	450-1 275 (300-1)			
LPV	DA	639-1 $\frac{3}{8}$ 464 (500-1 $\frac{3}{8}$)			
RNAV/ VNAV	DA	807-1 $\frac{3}{4}$ 632 (700-1 $\frac{3}{4}$)			
RNAV	MDA	1740-1 $\frac{1}{4}$ 1565 (1600-1 $\frac{1}{4}$)	1740-1 $\frac{1}{2}$ 1565 (1600-1 $\frac{1}{2}$)	1740-3 1565 (1600-3)	
CIRCLING		1740-1 $\frac{1}{4}$ 1561 (1600-1 $\frac{1}{4}$)	1740-1 $\frac{1}{2}$ 1561 (1600-1 $\frac{1}{2}$)	1740-3 1561 (1600-3)	

MIRL Rwy 7-25

REIL Rwy 25

BOB BAKER MEML (IAN) (PAIK)
RNAV (GPS) RWY 25

AK, 27 NOV 2025 to 22 JAN 2026