


		TOP ALTITUDE: ASSIGNED BY ATC
MIAMI DEP CON 125.5 334.1 125.5-3 125.5-3 128.3/5 UNAV 122.8	RNAV 1 - DME/DME/RU or GPS. From SLPT to MAXIM: RNAV 1- GPS, From SLPT to CANOA: RNAV 1- GPS. RADAR required for non-GPS equipped aircraft. RADAR required.	

TAKEOFF MINIMUMS

Rwy 10: Standard with minimum climb of 500'/NM to 2400.
Rwy 18: Standard with minimum climb of 500'/NM to 1800.
Rwy 28: Standard with minimum climb of 500'/NM to 1900.
Rwy 36: Standard with minimum climb of 500'/NM to 2200.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

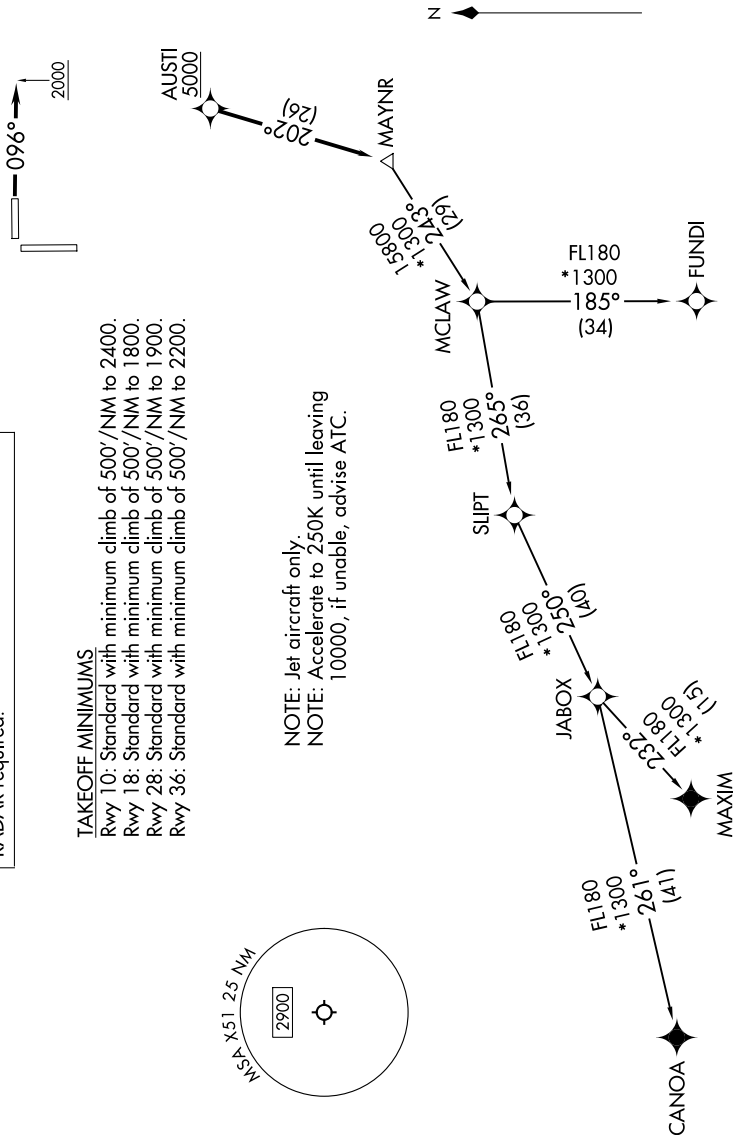

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 25 DEC 2025 to 22 JAN 2026