

WAAS
CH **78313**
W24A

APP CRS
244°

Rwy Ldg
TDZE
Apt Elev
4000
55
55

RNAV (GPS) RWY 24

ROBERT/BOB/CURTIS MEML (D76) (PFNO)

RNP APCH.
▼
▲
-22°C


For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -20°C or above
54°C.

MISSED APPROACH: Climb to 2700 direct ODMEE and hold,
continue climb-in-hold to 2700.

AWOS-3P
120.0

ANCHORAGE CENTER
119.2 263.0

CTAF
122.7

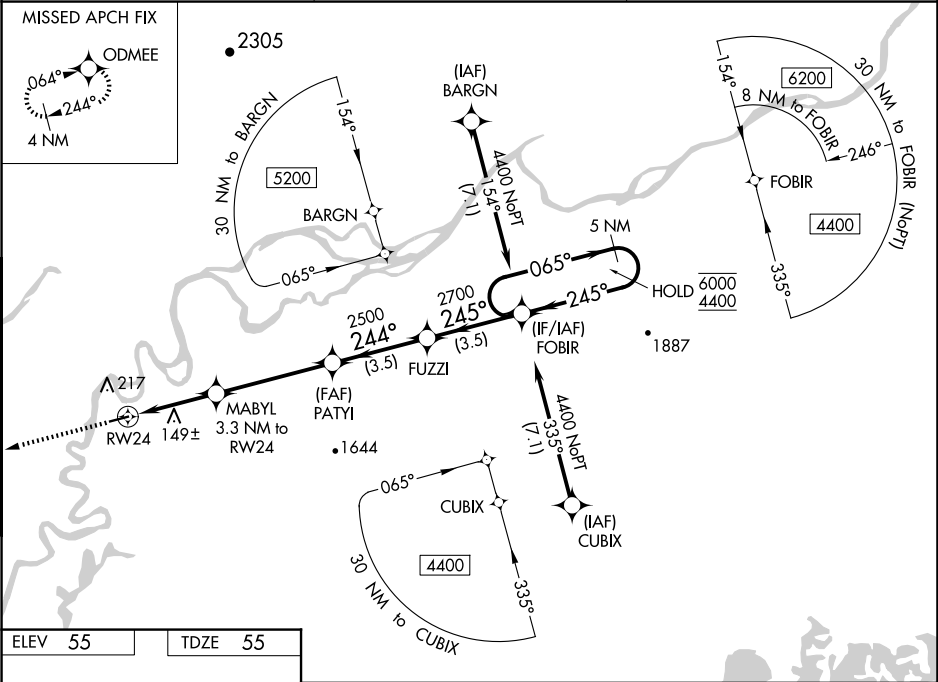

ELEV 55

TDZE 55

2700 ODMEE

*LNAV only

MABYL 3.3 NM to RW24

*1.2 NM to RW24

RW24

PATYI 2500

FUZZI

FOBIIR

5 NM Holding Pattern

065° 244° 245°

6000 4400

GP 3.00° TCH 40

1120*

1.2 2.1 NM 4.3 NM 3.5 NM 3.5 NM

CATEGORY	A	B	C	D
LPV DA	305-1 250 (300-1)			
LNAV/ VNAV DA	355-1 300 (300-1)			
LNAV MDA	460-1 405 (500-1)		460-1½ 405 (500-1½)	
CIRCLING	520-1 465 (500-1)		520-1½ 465 (500-1½) 760-2¼ 705 (800-2¼)	

MIRL Rwy 6-24