

WAAS CH 69537 W34A	APP CRS 340°	Rwy Idg 3500 TDZE 1482 Apt Elev 1482
--	------------------------	---

RNAV (GPS) RWY 34

CANDO MUNI (9D7)


▼

NA

DME/DME RNP-0.3 NA. When local altimeter not received, use Devils Lake altimeter setting and increase all DA 63 feet and all MDA 80 feet. Increase LPV visibility 1/8 mile all Cats and LNAV/VNAV visibility 1/4 mile all Cats. Baro-VNAV and VDP NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (0°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 1900 then
climbing left turn to 3600
direct CAREW and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 124.2 270.3	CTAF 122.9 0
--------------------------	--	------------------------

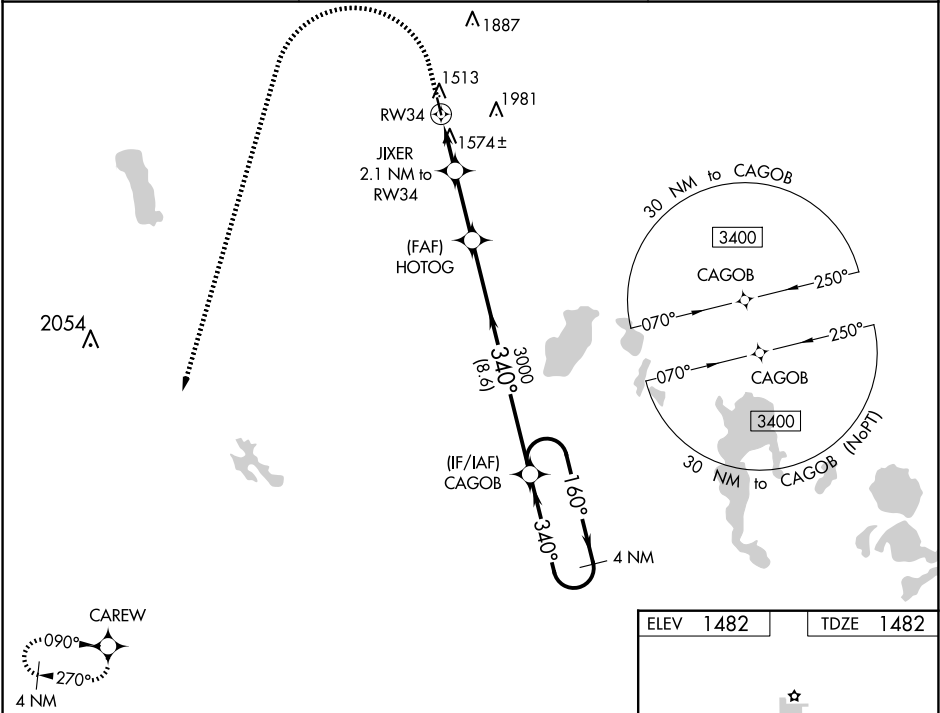

1900

3600

CAREW

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).

HOTOG

CAGOB

4 NM Holding Pattern

*LNAV only.

JIXER 2.1 NM to RW34

*1 NM to RW34

RW34

2180*


3000

3400

GP 3.00° TCH 35

1 NM 1.1 NM 2.6 NM 8.6 NM

CATEGORY	A	B	C	D
LPV DA	1732-1	250 (300-1)		NA
LNAV/VNAV DA	1871-13/8	389 (400-13/8)		NA
LNAV MDA	1840-1	358 (400-1)		NA
CIRCLING	1900-1 418 (500-1)	1940-1 458 (500-1)		NA

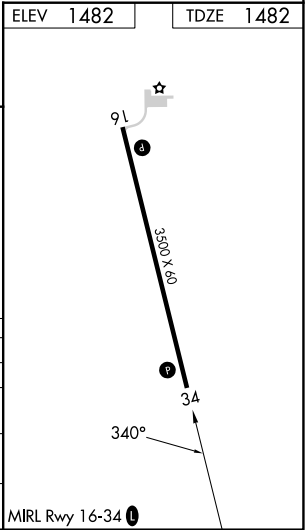

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026