



WAAS CH 82047 W31A	APP CRS 311°	Rwy Ldg TDZE Apt Elev	3798 3505 3505
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31


EKALAKA (97M)

RNP APCH - GPS.	Baro-VNAV NA. Rwy 31 helicopter visibility reduction below ¾ SM NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3960 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 4460 feet; increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM.	MISSED APPROACH: Climb to 7000 direct ELTRO and hold, continue climb-in-hold to 7000.
-----------------	---	---

BHK ASOS 135.475	SALT LAKE CENTER 126.85 305.2	CTAF 122.9 0
----------------------------	---	------------------------

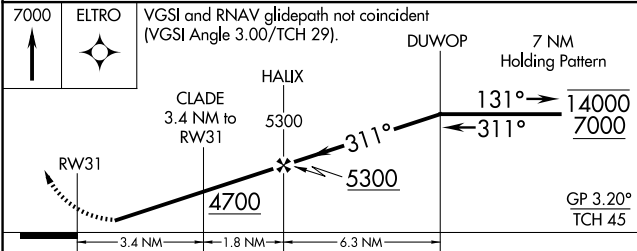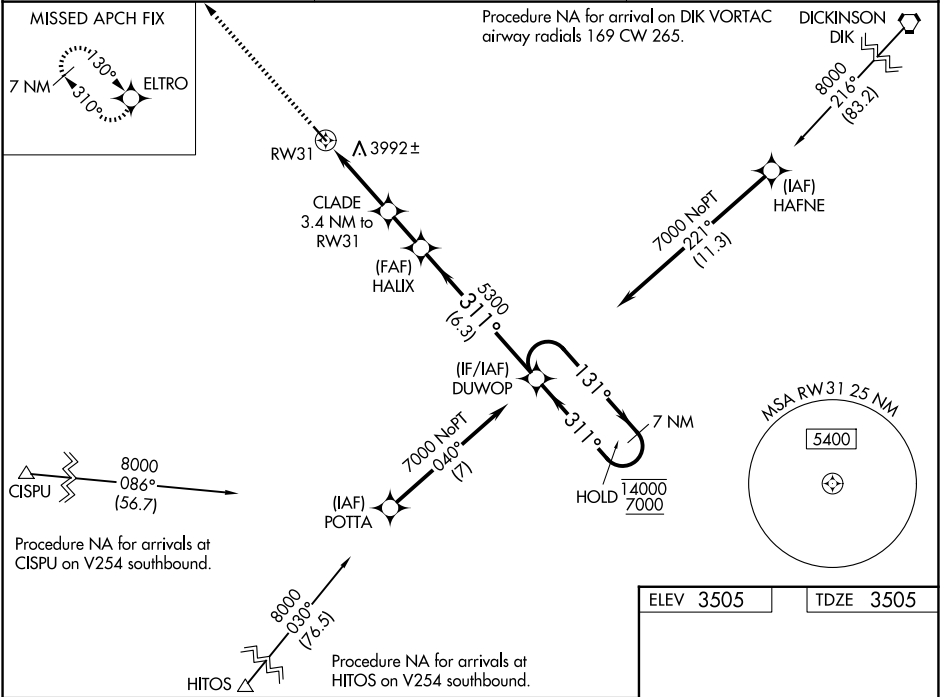

CATEGORY	A	B	C	D
LPV DA	3900-1½ 395 (400-1½)			
LNAV/VNAV DA	4400-2½ 895 (900-2½)			
LNAV MDA	4400-1¼ 895 (900-1¼)	4400-1½ 895 (900-1½)	4400-3	895 (900-3)

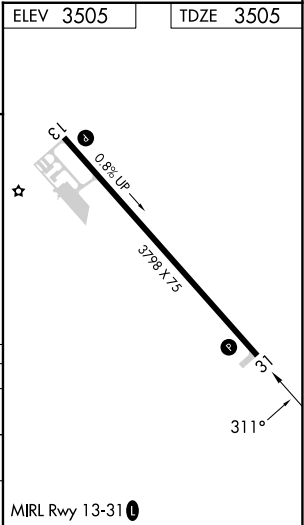

NW-1, 25 DEC 2025 to 22 JAN 2026

NW-1, 25 DEC 2025 to 22 JAN 2026