

WAAS CH 65832 W18A	APP CRS 182°	Rwy Idg TDZE 239 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 18


DELTA RGNL (DRP)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting: increase LPV DA to 507 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 668 feet and all visibilities 1⁄4 SM; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct USUDY and hold, continue climb-in-hold to 3000.

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF) 0
-------------------------	--------------------------------------	---------------------------------

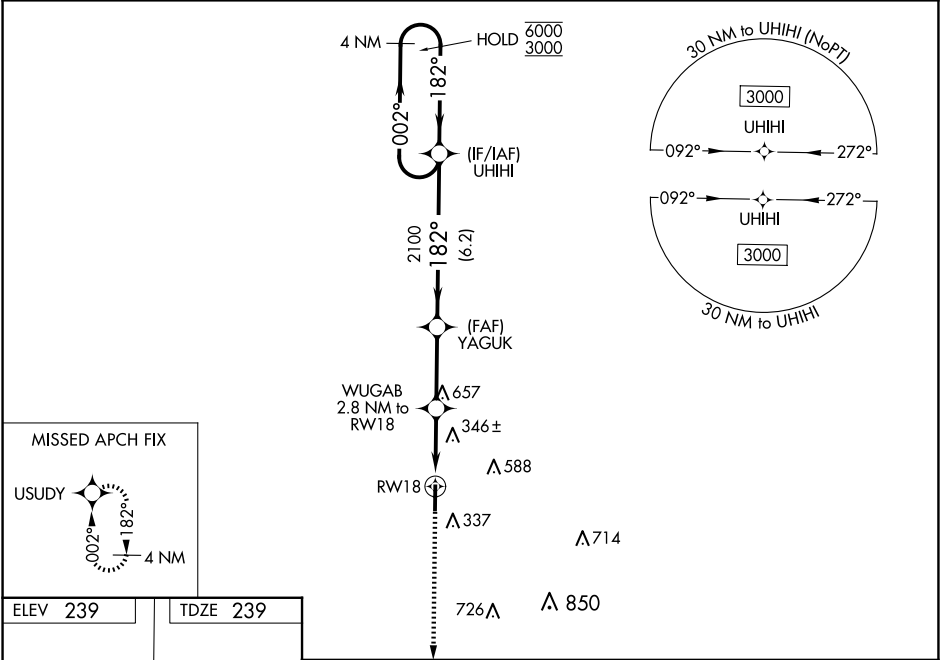

CATEGORY	A	B	C	D
LPV DA	439- ³ / ₄	200 (200- ³ / ₄)	NA	
LNAV/VNAV DA	600-1	361 (400-1)	NA	
LNAV MDA	600-1	361 (400-1)	NA	
C CIRCLING	760-1	521 (600-1)	NA	

HIRL Rwy 18-36 **1**
 REIL Rws 18 & 36 **1**