

APP CRS	Rwy Ldg	3416
125°	TDZE	1924
	Apt Elev	1924


RNAV (GPS) RWY 12
NEW TOWN MUNI (Ø5D)

RNP APCH.



NA Use Stanley altimeter setting, when not received, use Tioga altimeter setting and increase all MDAs 40 feet. Increase Cat C visibilities $\frac{1}{4}$ SM. Rwy 12 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 4500 direct SUSUE and hold.

MINNEAPOLIS CENTER
127.6 279.6

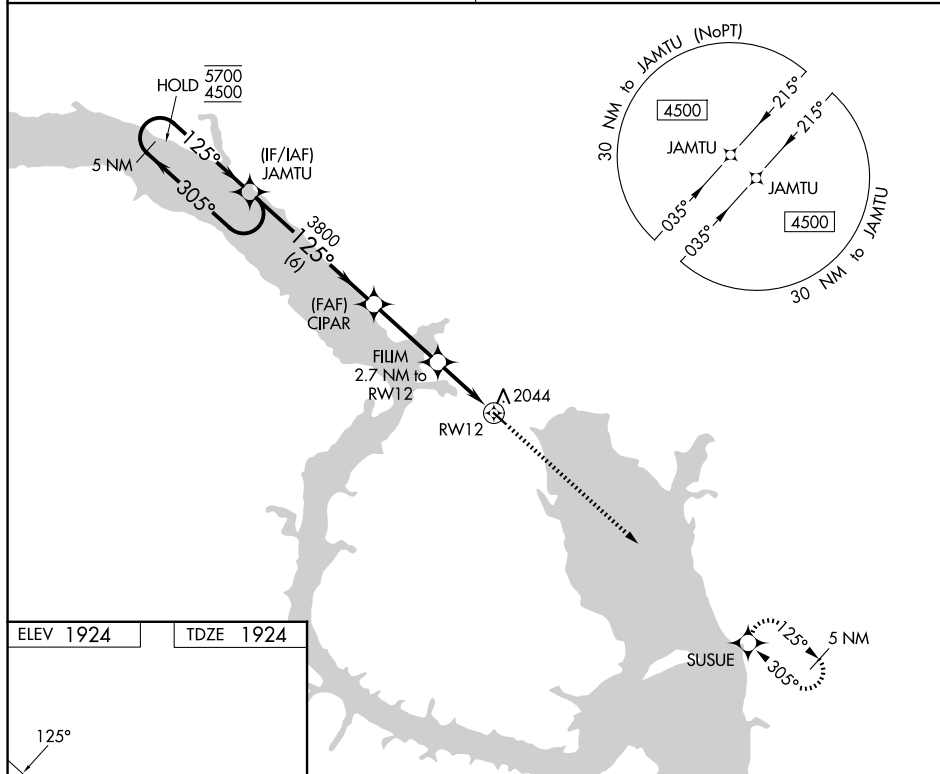CTAF
122.9 **L**

ELEV 1924		TDZE 1924
-----------	--	-----------

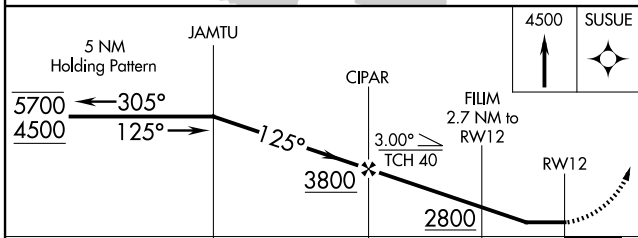

CATEGORY	A	B	C	D
LNAV MDA	2440-1	516 (600-1)	2440-1 $\frac{3}{8}$ 516 (600-1 $\frac{3}{8}$)	NA
CIRCLING	2520-1 596 (600-1)	2620-1 696 (700-1)	2780-2 $\frac{1}{2}$ 856 (900-2 $\frac{1}{2}$)	NA

NEW TOWN, NORTH DAKOTA
Orig 31DEC20

47°58'N-102°29'W

NEW TOWN MUNI (Ø5D)
RNAV (GPS) RWY 12