

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>42538</b><br><b>W31A</b> | APP CRS<br><b>313°</b> | Rwy Ldg <b>5701</b><br>TDZE <b>2965</b><br>Apt Elev <b>2965</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|


RNAV (GPS) RWY 31

BOWMAN RGNL (BWW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, increase LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Hettinger altimeter setting.

MISSED APPROACH:  
Climb to 3500 then  
descending right turn to  
6000 direct HAYNI  
and hold.

|                            |                                              |                               |
|----------------------------|----------------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.075</b> | SALT LAKE CITY CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|----------------------------------------------|-------------------------------|

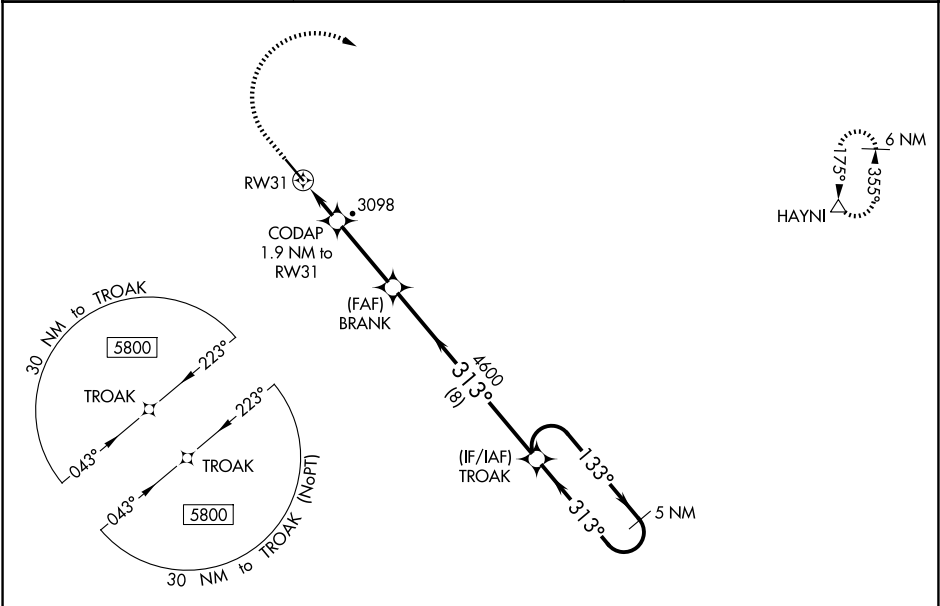

ELEV 2965

TDZE 2965

REIL Rwys 13 and 31  
MRL Rwy 13-31

|              |                       |                            |                         |                                  |
|--------------|-----------------------|----------------------------|-------------------------|----------------------------------|
|              | 3500                  | 6000                       | HAYNI                   |                                  |
|              | ↑                     | ↪                          | △                       |                                  |
| *LNAV only   |                       |                            |                         |                                  |
|              | RW31                  | CODAP<br>1.9 NM to<br>RW31 | BRANK<br>4600           | TROAK<br>5 NM<br>Holding Pattern |
|              |                       | *1.1 NM<br>to RW31         | *3600                   | 4600                             |
|              | 1.1 NM                | 0.8 NM                     | 3.1 NM                  | 8 NM                             |
| CATEGORY     | A                     | B                          | C                       | D                                |
| LPV DA       |                       | 3215-1                     | 250 (300-1)             |                                  |
| LNAV/VNAV DA |                       | 3227-1                     | 262 (300-1)             |                                  |
| LNAV MDA     | 3360-1                | 395 (400-1)                | 3360-1½                 | 395 (400-1½)                     |
| CIRCLING     | 3380-1<br>415 (500-1) | 3420-1<br>455 (500-1)      | 3580-1¾<br>615 (700-1¾) | 3580-2<br>615 (700-2)            |