

BOSTON DEP CON		
1330	RNAV 1 - DME/DME/IRU or GPS.	
DEATS	RADAR required for non-GPS equipped aircraft.	TOP ALTITUDE: 5000

TAKEOFF MINIMUMS:

Rwy 4L, 14, 15L, 32, 33R: NA-ATC.

Rwy 4R: Standard with minimum climb of 500'/NM to 520;

Rwy 9: Standard with minimum climb of 500'/NM to 520.

Rwy 15R: Standard with minimum climb of 500'/NM to 520.

Rwy 22L: 300-1 with minimum climb of 500'/NM to 520, or

standard with minimum climb of 500' / NM to 520 if tower


reports no tall vessels in the departure area.

Rwy 22R: Standard with minimum climb of 500'/NM to 520.

Rwy 27: Standard with a minimum climb of 500'/NM to 1300'

331. Standard with a minimum climb of 500'/NM to 520

NOTE: Jet aircraft only.

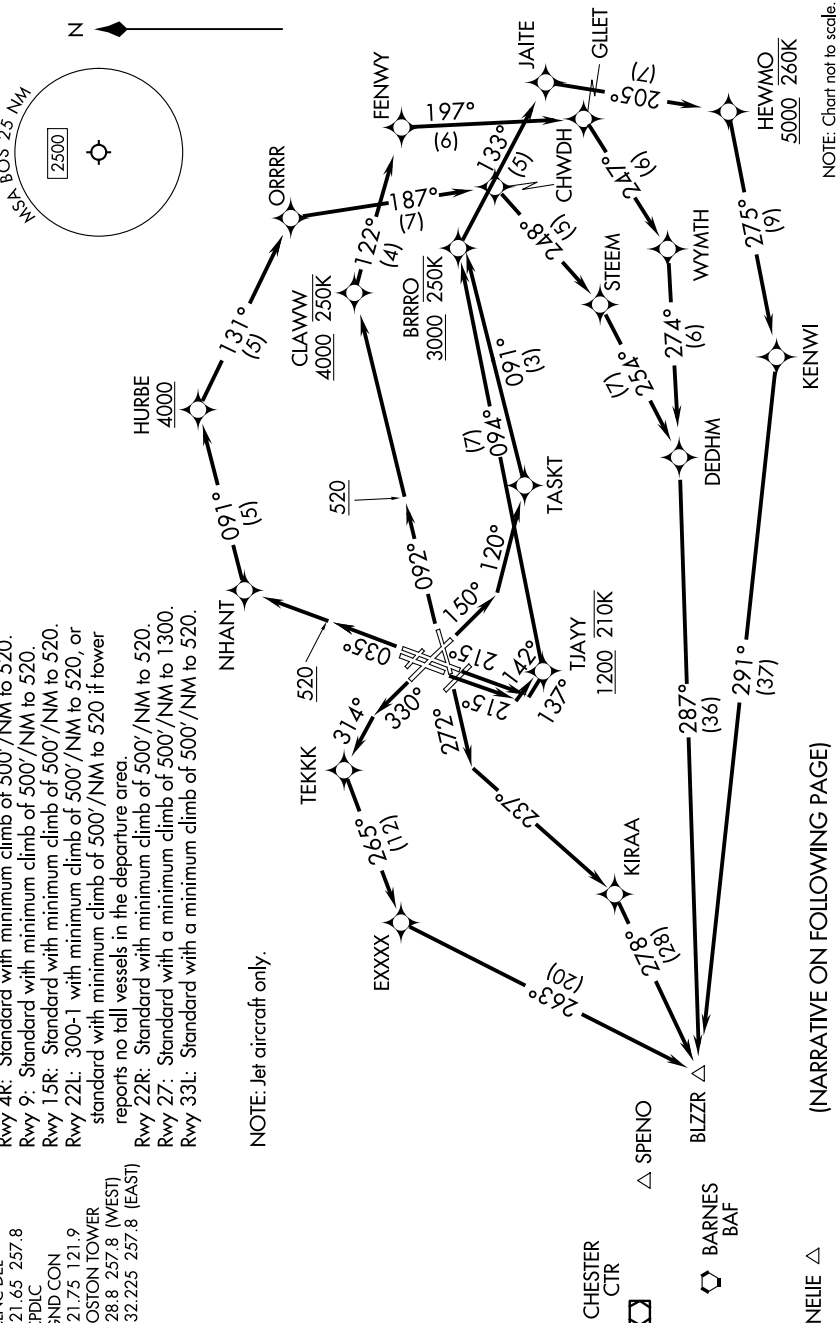

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

NE-1, 22 JAN 2026 to 19 FEB 2026