

WAAS CH 62911 W30A	APP CRS 303°	Rwy Ldg 10201 TDZE 1380 Apt Elev 1384
--	------------------------	--

RNAV (GPS) Y RWY 30C

MESA GATEWAY (IWA)


▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase LPV DA to 1660 feet, LNAV/VNAV DA to 1710 feet and all MDA 80 feet; increase LPV all Cats visibility ½ SM, increase LNAV/VNAV all Cats, LNAV Cats C, D and E, and Circling Cats D, E visibility ¼ SM. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH:
Climb to 2800 then climbing left turn to 5000 direct GICGE and hold.

ATIS 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8
------------------------------	---------------------------------------	--	--------------------------------

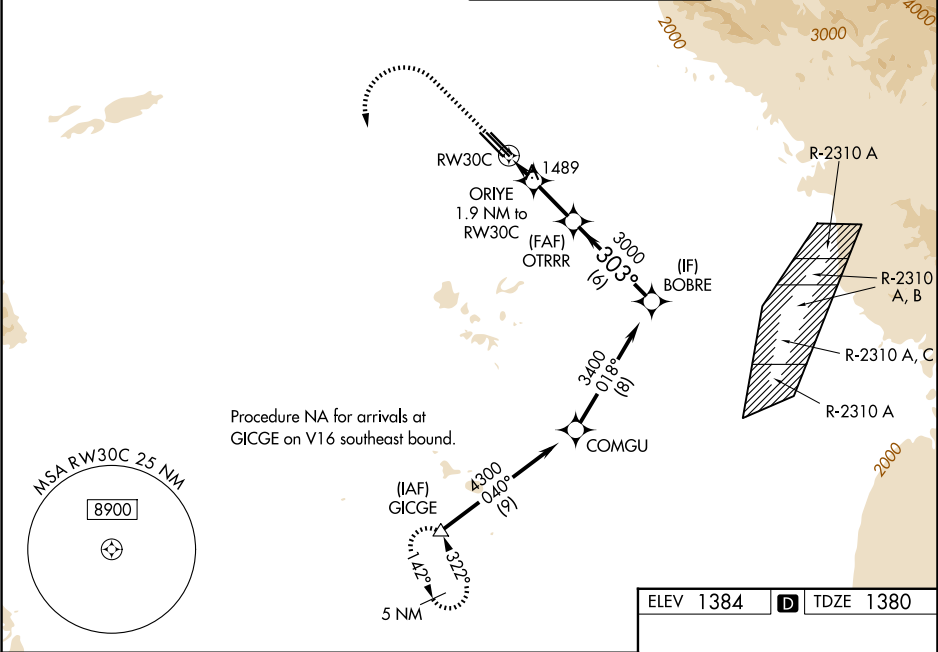

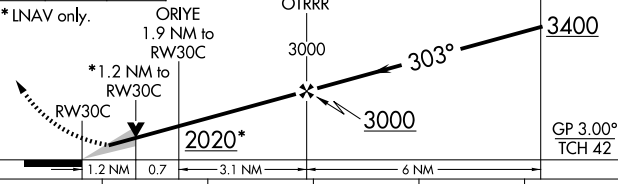2800	5000	GICGE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).				
							
* LNAV only.							
							
CATEGORY	A		B		C	D	E
LPV DA	1580-¾ 200 (200-¾)						
LNAV/ VNAV	1630-⅞ 250 (300-⅞)						
LNAV MDA	1800-1	420 (500-1)	1800-1½ 420 (500-1½)				
CIRCLING	1880-1	496 (500-1)	1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2040-2¼ 656 (700-2¼)		

ELEV 1384 D TDZE 1380

MIRL Rwy 12R-30L
HIRL Rwys 12L-30R and 12C-30C
REIL Rwys 12L and 30R