


WAAS CH 86701 W25A	APP CRS 246°	Rwy Ldg TDZE 478 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 25

CINCINNATI MUNI/LUNKEN FLD (LUK)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using CVG altimeter setting. Rwy 25 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use CVG altimeter setting and increase LPV DA to 961 feet, all visibilities ½ SM; increase LNAV/VNAV DA to 1248 feet; increase all MDAs 100 feet, LNAV Cat B visibility ¼ SM, and LNAV Cat C/D visibility ½ SM.	MISSED APPROACH: Climb to 2500 direct JULVU and on track 173° to SHILA and on track 096° to CALIF and hold, continue climb-in-hold to 2600.
-----------------	---	---

ATIS 123.6	CINCINNATI APP CON 121.0 254.25	LUNKEN TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

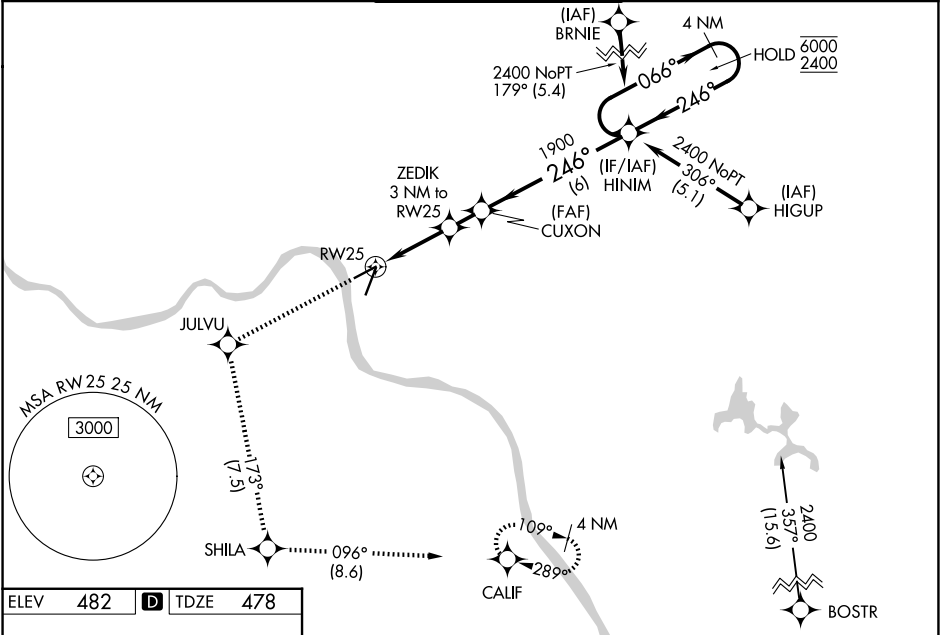

ELEV 482	D	TDZE 478
-----------------	----------	-----------------

REIL Rwy 3
HIRL Rwy 3-21
MIRL Rwy 7-25

2500	JULVU	tr 173°	SHILA	tr 096°	CALIF	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).
4 NM Holding Pattern						
GP 3.00° TCH 55						
CATEGORY	A		B		C	D
LPV DA	875-1¼					397 (400-1¼)
LNAV/VNAV DA	1162-2½					684 (700-2½)
LNAV MDA	1160-1		682 (700-1)		1160-2	682 (700-2)

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026