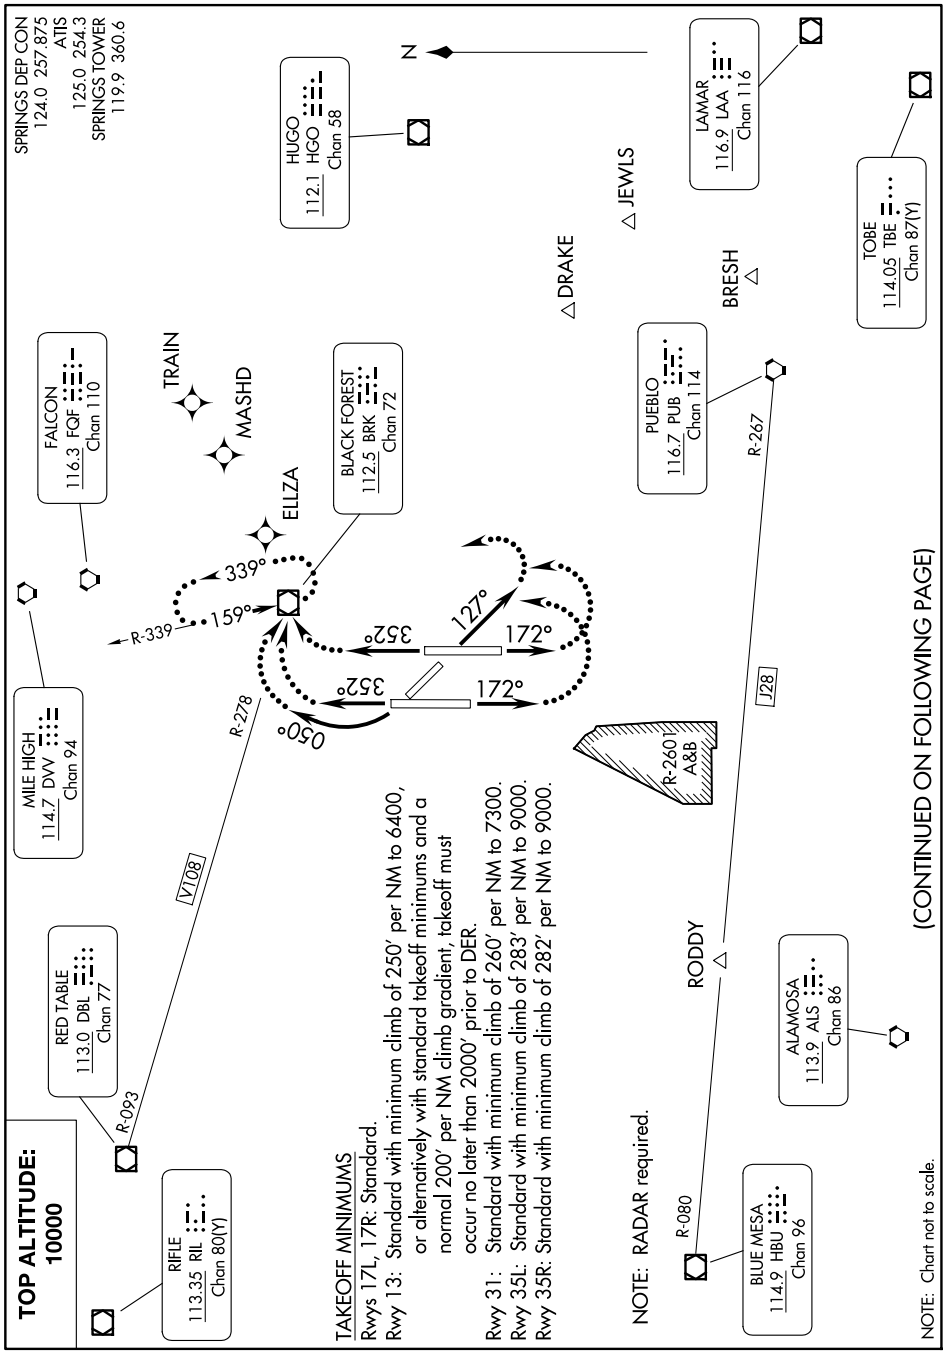
SPRINGS DEP CON
124.0 257.875
ATIS
125.0 254.3
SPRINGS TOWER
119.9 360.6
N
HUGO
112.1 HGO
Chan 58
LAMAR
116.9 LAA
Chan 116
TOBE
114.05 TBE
Chan 87(Y)
JEWLS
DRAKE
BRESH
FALCON
116.3 FQF
Chan 110
TRAIN
MASHD
ELLZA
BLACK FOREST
112.5 BRK
Chan 72
PUEBLO
116.7 PUB
Chan 114
R-267
339°
159°
R-339
352°
172°
127°
352°
172°
050°
R-278
V108
J28
R-260T
A&B
MILE HIGH
114.7 DVV
Chan 94
RED TABLE
113.0 DBL
Chan 77
R-093
RIFLE
113.35 RIL
Chan 80(Y)
RODDY
ALAMOSA
113.9 ALS
Chan 86
BLUE MESA
114.9 HBU
Chan 96
R-080
TOP ALTITUDE:
10000
TAKEOFF MINIMUMS
Rwys 17L, 17R: Standard.
Rwy 13: Standard with minimum climb of 250' per NM to 6400, or alternatively with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 2000' prior to DER.
Rwy 31: Standard with minimum climb of 260' per NM to 7300.
Rwy 35L: Standard with minimum climb of 283' per NM to 9000.
Rwy 35R: Standard with minimum climb of 282' per NM to 9000.
NOTE: RADAR required.
NOTE: Chart not to scale.
(CONTINUED ON FOLLOWING PAGE)