


LOC/DME I-VGU	APP CRS	Rwy Ldg	9001
111.9	131°	TDZE	922
Chan 56		Apt Elev	958


ILS or LOC RWY 13
DES MOINES INTL (DSM)

V DME required. For inop ALS, increase S-LOC 13 Cats C/D visibility to RVR 4500. A #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct DSM VORTAC then on DSM VORTAC R-254 to MIDDLE INT/DSM 12 DME and hold.
--	---

ATIS 119.55	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6
----------------	------------------------------------	---------------------------------	------------------------

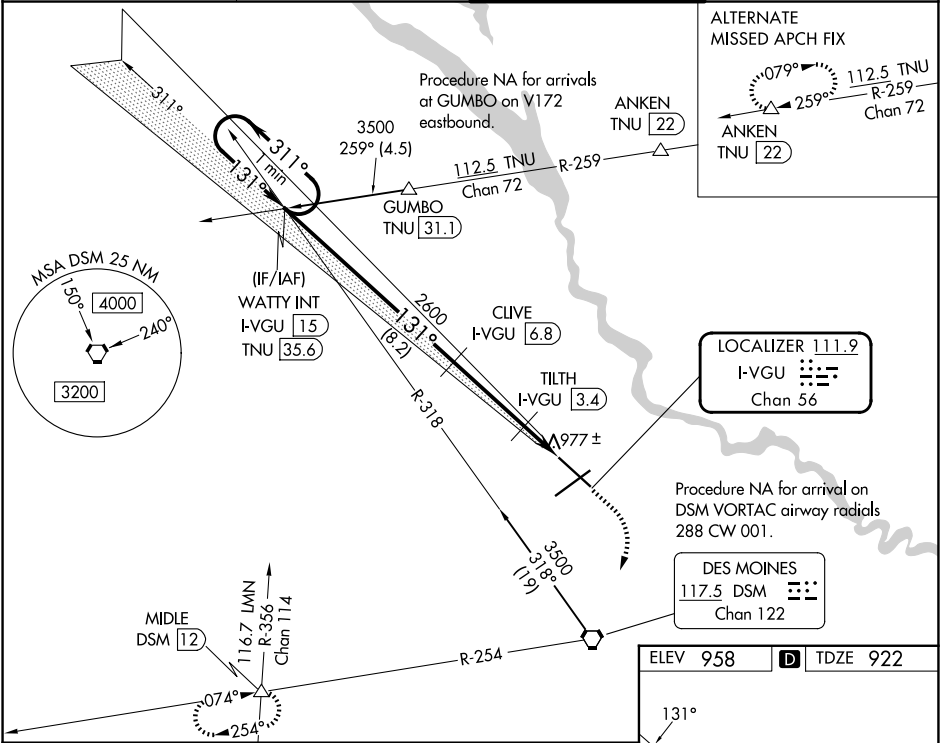

One Minute Holding Pattern 3500 ← 311° 131° → GS 3.00° TCH 56	WATTY INT I-VGU 15				1600 ↑	3000 ↷	DSM ⬡	DSM R-254	MIDDLE △
	CLIVE I-VGU 6.8 TILTH I-VGU 3.4 *I-VGU 2.5 I-VGU 1.7 *LOC only				3500 ← 311° 131° → 2600 1731° *1440				
CATEGORY	A		B		C		D		
S-ILS 13#	1122/24 200 (200-½)								
S-LOC 13	1240/24 318 (300-½)								
CIRCLING	1420-1		462 (500-1)		1600-1¾ 642 (700-1¾)		1760-2½ 802 (900-2½)		

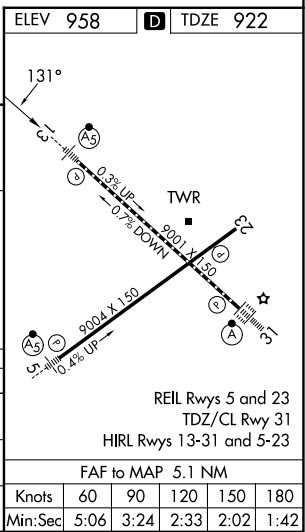

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026