

LOC I-HLN 110.1	APP CRS 271°	Rwy Ldg TDZE Apt Elev	9000 3852 3877
---------------------------	------------------------	-----------------------------	---

ILS Y or LOC Y RWY 27
HELENA RGNL (HLN)

ADF or RADAR required for procedure entry. ADF or DME required.



 Circling NA to Rwy's 10 and 28. Circling Rwy 5, 23, 35 NA at night. Inop
 table does not apply to S-LOC 27 all Cats. For inop ALS, increase S-ILS 27
 all Cats visibility to 1% SM, ORYON fix minimums: S-LOC 27 Cat C/D/E
-16°C visibility to 2 SM. Holding at HAU NDB authorized for Cat A and B aircraft
only. Circling NA for Cats D and E south of Rwy 9-27.
* DME from HUN VORTAC. DME use requires simultaneous reception of H-HUN
and HUN DME.

MALSR



MISSED APPROACH: Climb to 4700 then climbing right turn to 9300 on heading 021° and on HLN VORTAC R-340 to WOKEN INT and hold, continue climb-in-hold to 9300.

ATIS 120.4	HELENA APP CON ★ 119.5 229.4	HELENA TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
---------------	---------------------------------	--	------------------	------------------

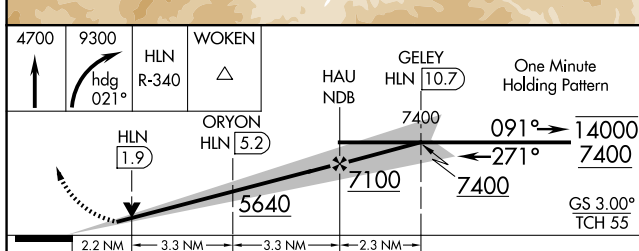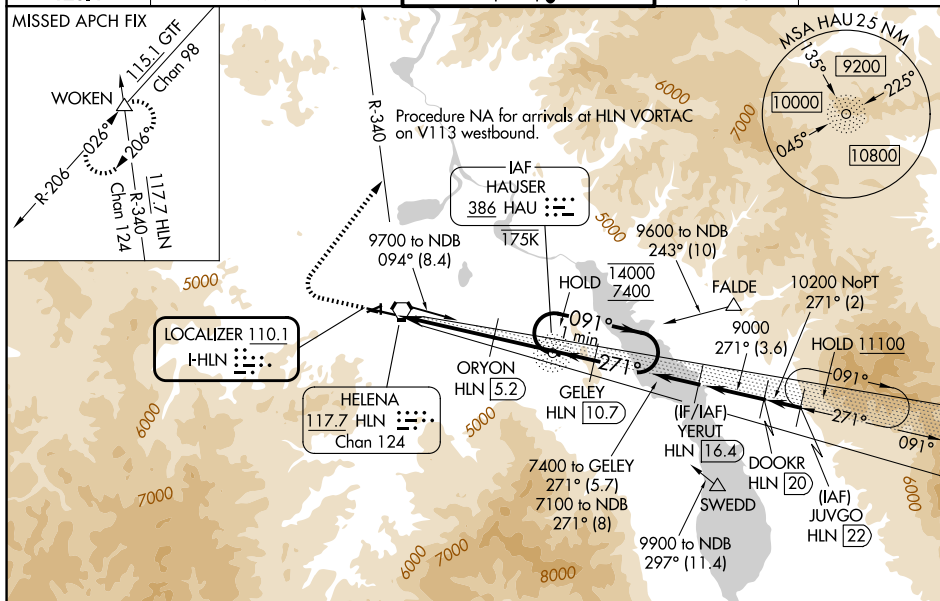

CATEGORY	A	B	C	D	E
S-ILS 27	4496-1 $\frac{3}{8}$ 644 (700-1 $\frac{3}{8}$)				
S-LOC 27	5640-1 $\frac{1}{4}$ 1788 (1800-1 $\frac{1}{4}$)	5640-1 $\frac{1}{2}$ 1788 (1800-1 $\frac{1}{2}$)	5640-3	1788 (1800-3)	
CIRCLING	5640-1 $\frac{1}{4}$ 1763 (1800-1 $\frac{1}{4}$)	5640-1 $\frac{1}{2}$ 1763 (1800-1 $\frac{1}{2}$)	6000-3	2123 (2200-3)	
ORYON FIX MINIMUMS*					
S-LOC 27	4600- $\frac{1}{2}$ 748 (800- $\frac{1}{2}$)	4600- $\frac{3}{4}$ 748 (800- $\frac{3}{4}$)	4600-1 $\frac{3}{4}$	748 (800-1 $\frac{3}{4}$)	
CIRCLING	4640-1 763 (800-1)	4800-1 $\frac{1}{4}$ 923 (1000-1 $\frac{1}{4}$)	6000-3	2123 (2200-3)	