

JACKSONVILLE, FLORIDA

RNAV (GPS) Z RWY 28

WAAS CH 46924 W28A	APCH CRS 276°	Rwy ldg TDZE 13 Arpt Elev 23
--	-------------------------	--

(USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)


RNP APCH

▼ * When ALS inop, increase CAT BCD to 7/8 mile.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.

SALSF	MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.
-------	---

ATIS 124.35 290.425	APP CON/DEP CON 127.775 377.075	TOWER 125.15 (CTAF) 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 0 353.675	ASR/PAR
-------------------------------	---	-------------------------------------	-------------------------------	--------------------------------------	---------



For uncompensated
BARO-VNAV systems,
Procedure NA below
-15°C (5°F) and
above 54°C (129°F).

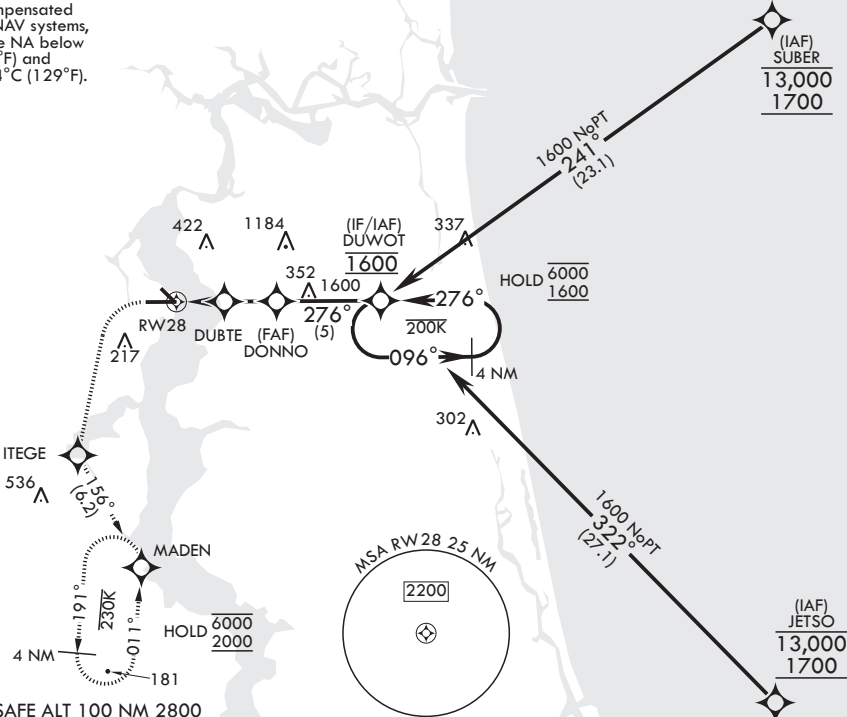

EMERG SAFE ALT 100 NM 2800

600 ↑ crs 276°	2000 ↖ ITEGE
-------------------------	--------------------

ELEV 23	See Supp for declared dist.	TDZE 13
---------	-----------------------------	---------

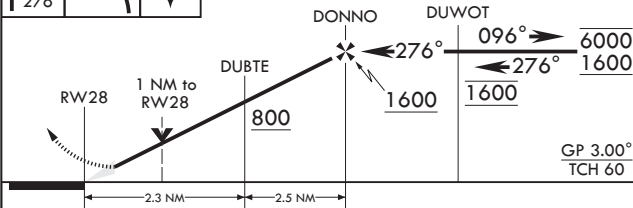

CATEGORY	A	B	C	D
LPV DA	213-¾	200	(200-¾)	
LNAV/VNAV DA*	263-¾ 250 (300-¾)	274-¾ 261 (300-¾)	282-¾ 269 (300-¾)	293-¾ 280 (300-¾)
LNAV MDA**	400-¾ 387 (400-¾)	400-¾ 387 (400-¾)	520-1½ 497 (500-1½)	760-2¼ 737 (800-2¼)
CIRCLING	500-1 477 (500-1)			

HIRL Rwy 10-28

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amndt 2 30OCT25

RNAV (GPS) Z RWY 28

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026