



LOC I-OAK	APP CRS	Rwy Ldg	28R 5457	28L 6213
109.9	278°	TDZE	7	9
		Apt Elev	9	9


ILS or LOC RWY 28R
OAKLAND SAN FRANCISCO BAY (OAK)

RNP APCH - GPS. From BBUBB or FFIIST or MYSHIN.		MALSR Rwy 28R 	MISSED APPROACH: Climb to 1900 then dimbing right turn to 3000 on heading 340° and SGD VORTAC R-165 to REBAS/SGD 14.3 DME and hold.
DME required.			
DME from OAK VOR/DME. Simultaneous reception of I-OAK and OAK DME required. *RVR 1800 authorized with use of FD or AP or HUD to DA.			
D-ATIS 133.775	NORCAL APP CON 125.35 263.15	OAKLAND TOWER 118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	GND CON 121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)

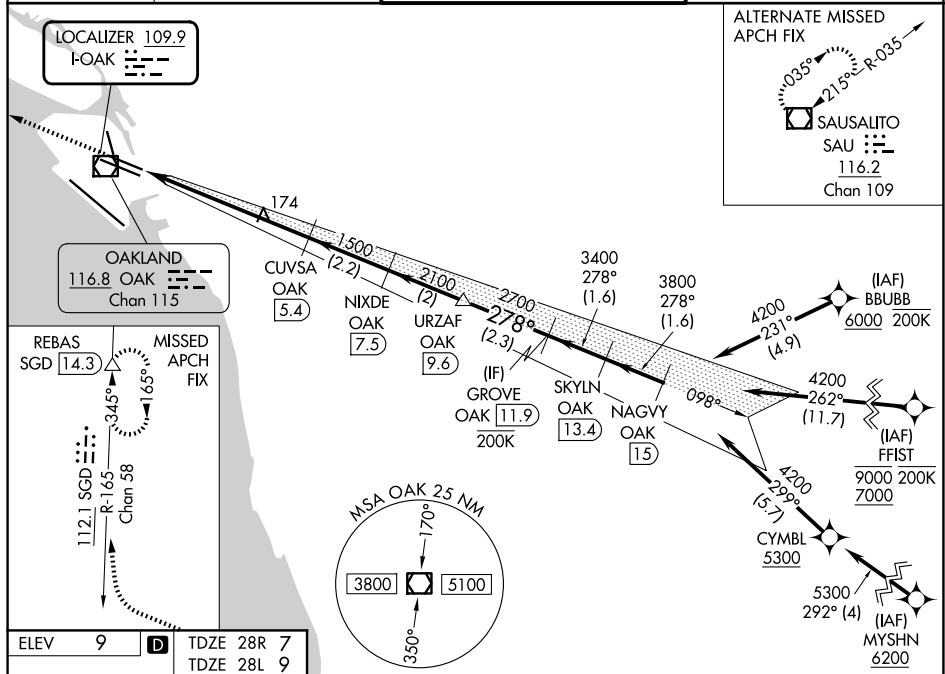

ELEV	9	D	TDZE 28R	7
			TDZE 28L	9

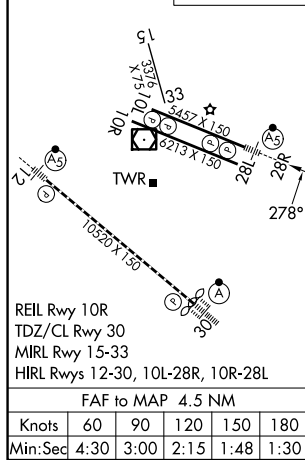

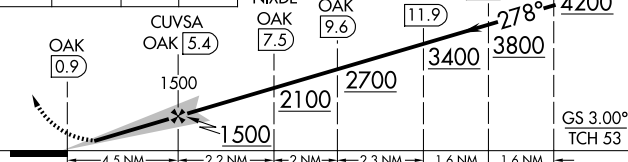1900 ↑	3000 hdg 340°	SGD R-165	REBAS △				
							
CATEGORY	A		B	C	D		
S-ILS 28R*	207/24 200 (200-½)						
S-LOC 28R	440/24 433 (500-½)			440/40 433 (500-¾)			
SIDESTEP 28L	440-1 431 (500-1)			440-1½ 431 (500-1½)		440-2 431 (500-2)	
CIRCLING	560-1 551 (600-1)			660-1¾ 651 (700-1¾)		1400-3 1391 (1400-3)	