

WAAS CH 82514 W23A	APP CRS 226°	Rwy Ldg TDZE Apt Elev	7031 3067 3082
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 23

ROBERTS FLD (RDM)

RNP APCH - GPS.

▼

⚠

❄


-16°C

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BDN altimeter setting. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. When local altimeter setting not received, use BDN altimeter setting and increase LPV DA to 3348 feet; increase LNAV/VNAV DA to 3586 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MALSR

MISSED APPROACH:
Climb to 4600 then climbing right turn to 7000 direct CUPRI and hold.

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER★ 124.5 (CTAF) 0 256.8	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

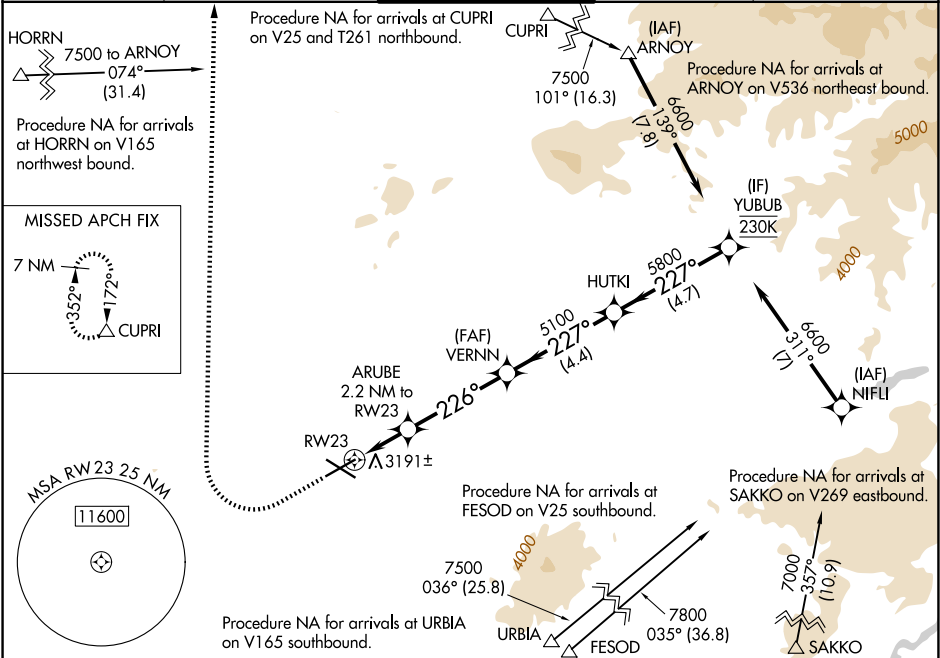

ELEV 3082	D	TDZE 3067	4600	7000	CUPRI	YUBUB
CATEGORY	A	B	C	D		
LPV DA	3267-½ 200 (200-½)					
LNAV/VNAV DA	3505-¾ 438 (500-¾)					
LNAV MDA	3640-½ 573 (600-½)		3640-1¼ 573 (600-1¼)			
CIRCLING	3640-1 558 (600-1)		3640-1½ 558 (600-1½)		3760-2¼ 678 (700-2¼)	