


APP CRS	Rwy Ldg	8956
123°	TDZE	541
	Apt Elev	617

RNAV (RNP) Z RWY 12L

ST LOUIS LAMBERT INTL (STL)

RNP AR APCH - GPS. Authorization required from HRBEE or RRIPP: RF.			ALSF-2	MISSED APPROACH: Climb to 3000 direct ODITY and track 071° to TOY VORTAC and hold.	
RADAR required for procedure entry					
Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 11, except for arrivals at RRIPP and HRBEE. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cnts visibility to 1 1/2 SM.					
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC

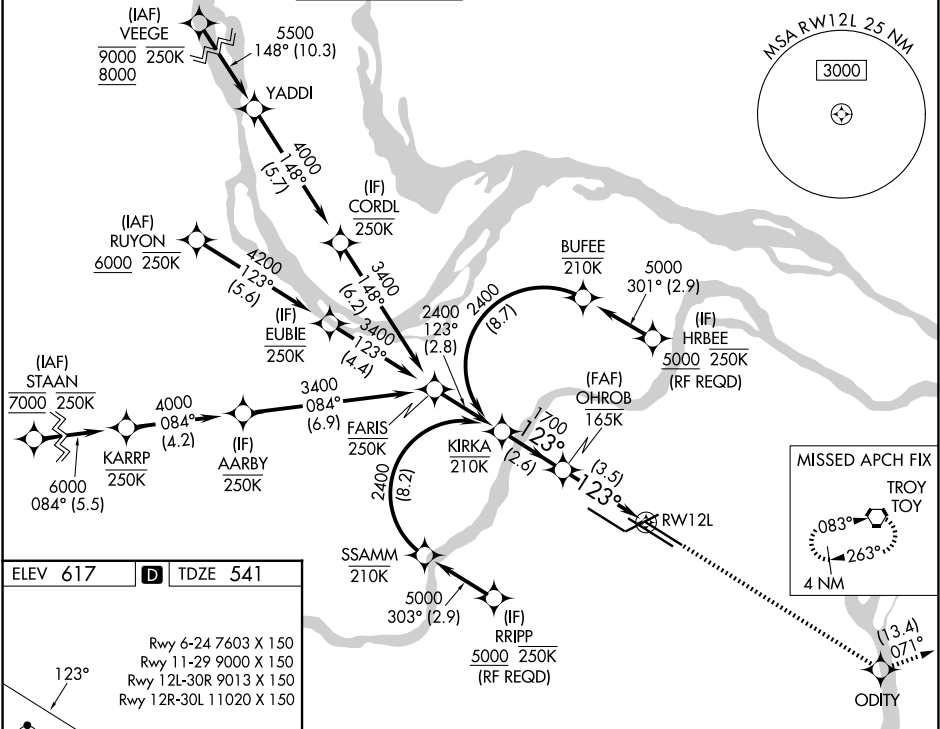

ELEV 617 | D | TDZE 541

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).

3000 | ODITY | tr 071° | TOY

See planview for multiple IF locations.

GP 3.00° TCH 54

2400 | 1700 | RW12L

2.6 NM | 3.5 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1055/55 514 (500-1)			

AUTHORIZATION REQUIRED

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026