

LOC/DME I-SMX	APP CRS	Rwy Ldg
108.9	120°	8004
Chan 26		TDZE 230
		Apt Elev 261

ILS or LOC RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

⚠ Night Landing: Rwy 2 NA. VDP NA when using San Luis Obispo altimeter setting. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase DA to 489 feet; increase all MDA 60 feet and S-LOC visibility Cat C and D to RVR 5500. For inop MALS, increase S-LOC 12 Cat C/D visibility to 1½ mile. # RVR 1800 authorized with use of FD or AP or HUD to DA; NA when using San Luis Obispo altimeter setting.

MALS

MISSED APPROACH:
Climb to 800, then climbing left turn to 5000 direct MQO VORTAC and hold.

ATIS	SANTA BARBARA APP CON *	SANTA MARIA TOWER *	GND CON	UNICOM
121.15	124.15 327.8	118.3 (CTAF) 239.25	121.9	122.95

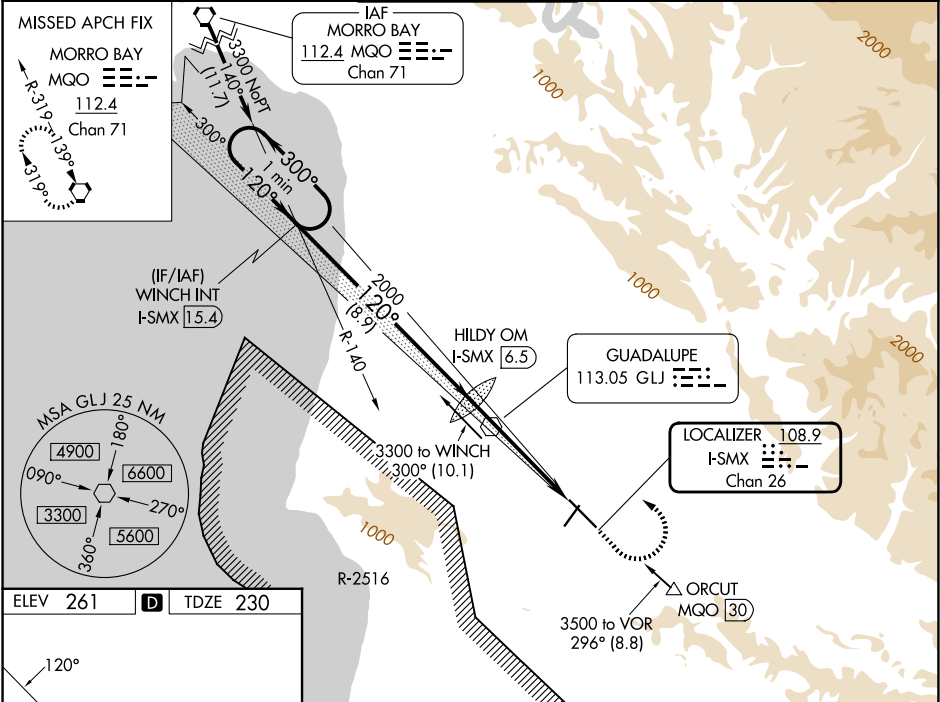

ELEV 261 | **D** | TDZE 230

HIRL Rwy 12-30

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

WINCH I-SMX 15.4 One Minute Holding Pattern 3300 ← 300° 120° → 1200 GS 3.00° TCH 55				HILDY OM I-SMX 6.5 1886 2000	I-SMX 2.7 I-SMX 1.5 * LOC only.	800 5000 MQO
8.9 NM 3.8 NM 1.2 NM						
CATEGORY	A	B	C	D		
S-ILS 12 #	430/24 200 (200-½)					
S-LOC 12	680/24 450 (500-½)		680/50 450 (500-1)			
CIRCLING	860-1 599 (600-1)		1420-3 1159 (1200-3)			
	1000-1 739 (800-1)		1520-3 1259 (1300-3)			

SW-3, 22 JAN 2026 to 19 FEB 2026

SW-3, 22 JAN 2026 to 19 FEB 2026