

WAAS CH 45515 W01A	APP CRS 006°	Rwy Ldg 7002 TDZE 39 Apt Elev 50
--	------------------------	---

RNAV (GPS) RWY 1
SAVANNAH/HILTON HEAD INTL (SAV)


RNP APCH.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).

MISSED APPROACH: Climb to 2500 direct SUTME and hold.

ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER ★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------	------------------------------------	--	------------------------	------------------

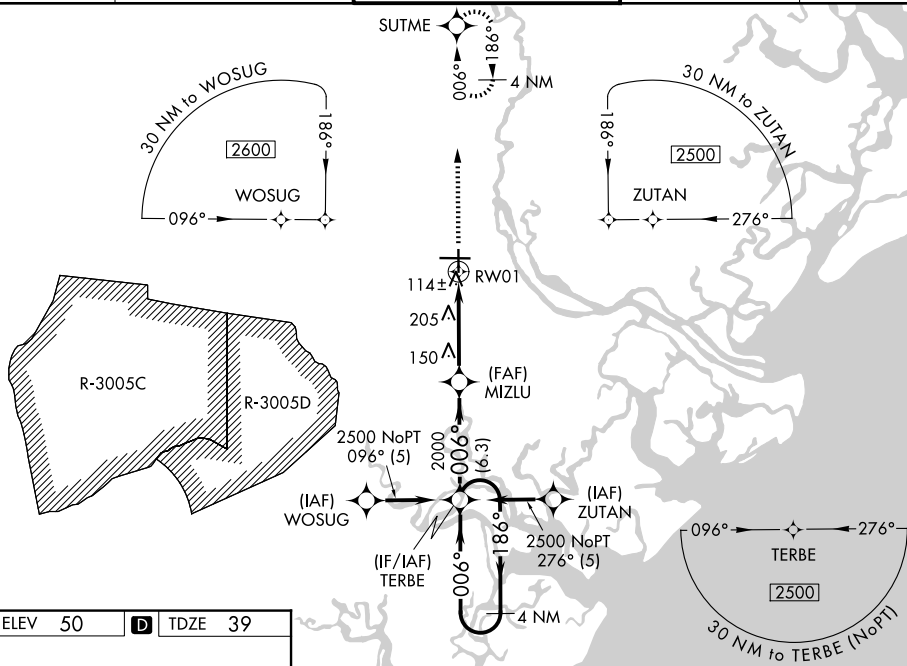

ELEV 50	D	TDZE 39
---------	----------	---------

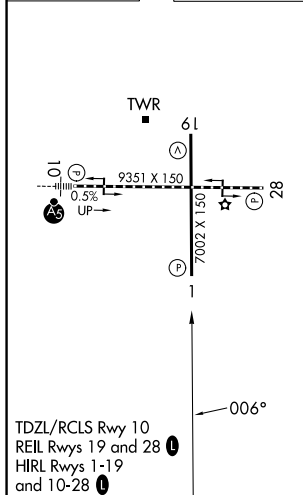

CATEGORY	A	B	C	D
LPV DA	239/40 200 (200-3/4)			
RNAV/ VNAV DA	384/60 345 (400-1 1/4)			
RNAV MDA	520/55 481 (500-1)		520-1 3/8 481 (500-1 3/8)	
CIRCLING	520-1 470 (500-1)		740-2 690 (700-2)	740-2 1/4 690 (700-2 1/4)