
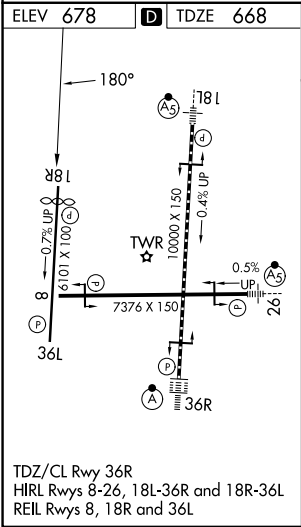


WAAS CH 69614 W18B	APP CRS 180°	Rwy Ldg TDZE 668 Apt Elev 678
--	------------------------	---

RNAV (GPS) RWY 18R
TULSA INTL (TUL)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3500 direct SUSNE and hold.
 Circling NA for Cat E south of Rwy 8-26. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.	ASR	

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (08/26, 18L/36R) 118.7 257.8 (18R/36L)	GND CON 121.9 348.6
------------------------------	-------------------------------------	--	-------------------------------

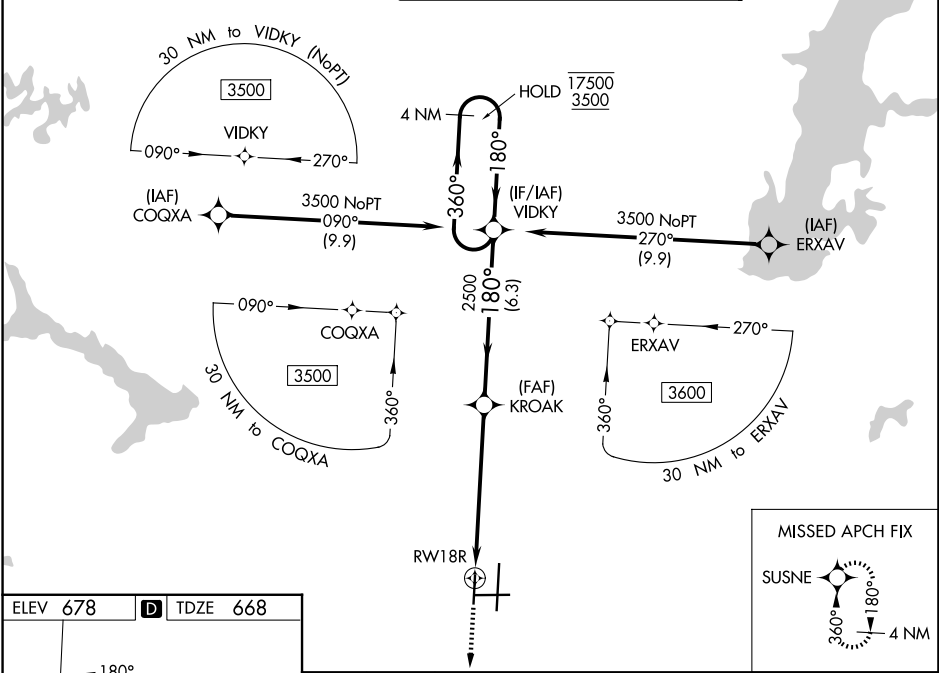

3500

↑

SUSNE

✦

VIDKY

4 NM Holding Pattern

360° → 17500

← 180° 3500

GP 2.75°

TCH 42

KROAK

2500

180°

2500

1.7 NM to RW18R

1.7 NM

4.5 NM

6.3 NM

RW18R

1.7 NM

CATEGORY	A	B	C	D	E
LPV DA	868-3/4		200 (200-3/4)		
LNAV/VNAV DA	954-7/8		286 (300-7/8)		
LNAV MDA	1180-1	512 (600-1)	1180-1 3/8 512 (600-1 3/8)		
CIRCLING	1180-1	502 (600-1)	1500-2 1/2 822 (900-2 1/2)	1520-2 3/4 842 (900-2 3/4)	1520-3 842 (900-3)