


WAAS CH 72810 W27A	APP CRS 274°	Rwy Ldg 7201 TDZE 770 Apt Elev 782
--	------------------------	---

RNAV (GPS) RWY 27
BISHOP INTL (FNT)


	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 27 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, LNAV Cat A/B visibility to 1 SM and LNAV Cat C/D visibility to 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 3000 direct CURGO and track 352° to CUOQ and hold.
---	--	--	--

ATIS 133.15	GREAT LAKES APP CON ★ 118.8 257.9	FLINT TOWER ★ 126.3 (CTAF) 0 257.9	GND CON 121.9	UNICOM 122.95
----------------	--------------------------------------	---------------------------------------	------------------	------------------

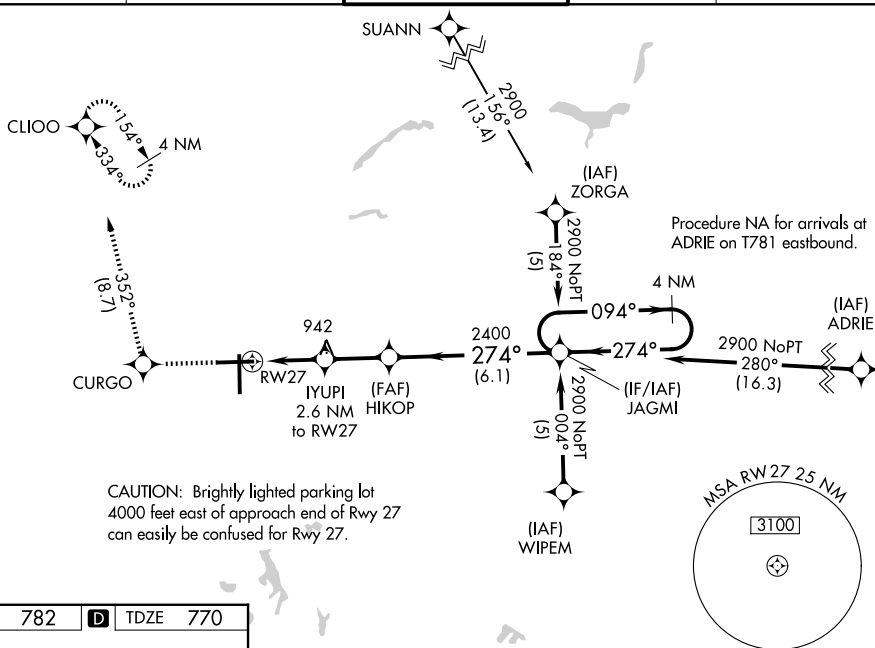

CAUTION: Brightly lighted parking lot 4000 feet east of approach end of Rwy 27 can easily be confused for Rwy 27.

ELEV	782	D	TDZE	770
------	-----	----------	------	-----

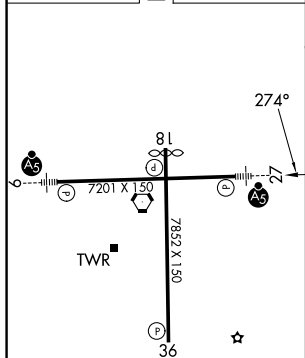

HIRL Rwy 9-27 and 18-36 **L**
REIL Rwy 18 and 36 **L**

3000 ↑	CURGO ✦	tr 352° ✦	CLIOO ✦	4 NM Holding Pattern JAGMI 094° → 2900 ← 274° GP 3.00° TCH 56			
* LNAV only RW27 * 1.4 NM to RW27 IYUPI 2.6 NM to RW27 * 1640 HIKOP 2400 274° 2400							
1.4 1.2 2.3 NM 6.1 NM							
CATEGORY	A		B		C		D
LPV DA			1098-¾ 328 (400-¾)				
LNAV/VNAV DA			1240-1 470 (500-1)				
LNAV MDA	1260-¾ 490 (500-¾)		1260-1 490 (500-1)				
CIRCLING	1260-1 478 (500-1)	1300-1 518 (600-1)	1300-1½ 518 (600-1½)	1520-2¼ 738 (800-2¼)			

BISHOP INTL (FNT)
RNAV (GPS) RWY 27