

WAAS CH 60938 W05A	APP CRS 054°	Rwy Ldg TDZE 70 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 5
NEW BEDFORD RGNL (EWB)



RNP APCH-GPS.

Baro-VNAV and VDP NA when using Taunton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taunton altimeter setting and increase LPV DA to 304 feet, increase LNAV/VNAV DA to 487 feet and all visibilities to RVR 5000; increase all MDA 40 feet and LNAV Cats C/D visibility to RVR 5000. For inop MALSR, when using Taunton altimeter setting, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3⁄8 miles. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Taunton altimeter setting.

MALSR

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2100 direct BONNI
and hold.

ATIS 126.85	PROVIDENCE APP CON* 128.7 269,525	NEW BEDFORD TOWER* 118.1 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

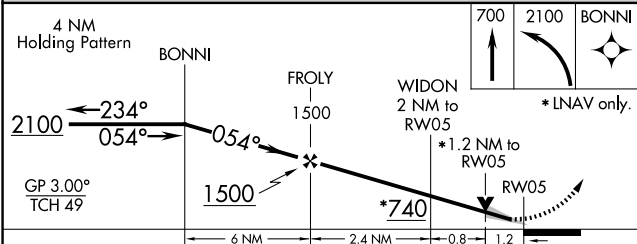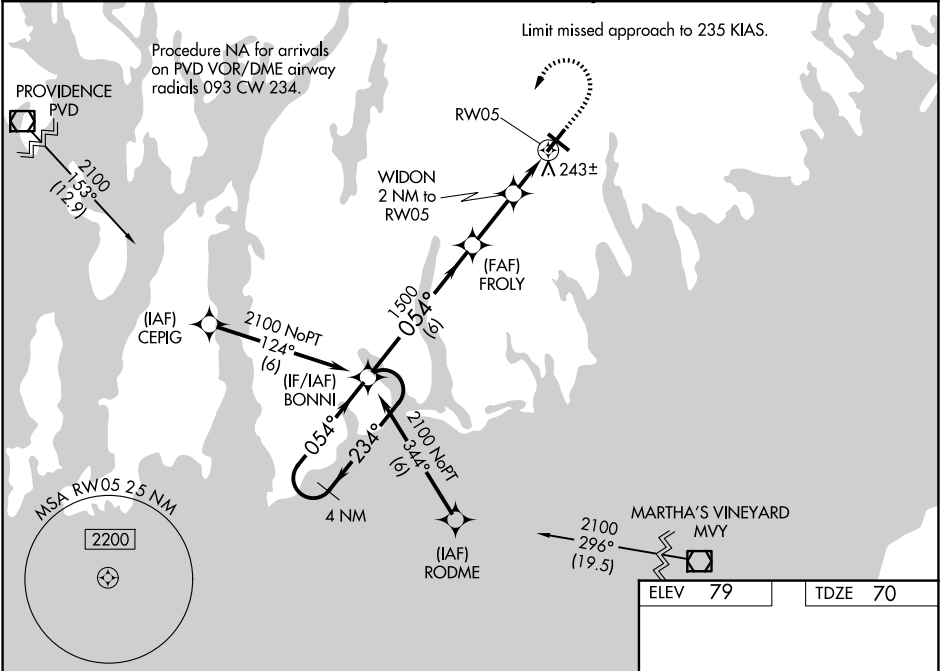

CATEGORY	A	B	C	D
LPV DA **		270/24	200 (200-½)	
LNAV/VNAV DA		453/45	383 (400-¾)	
LNAV MDA	500/24	430 (500-½)	500/40	430 (500-¾)
CIRCLING	620-1 541 (600-1)	640-1 561 (600-1)	720-1 ¾ 641 (700-1 ¾)	960-3 881 (900-3)

