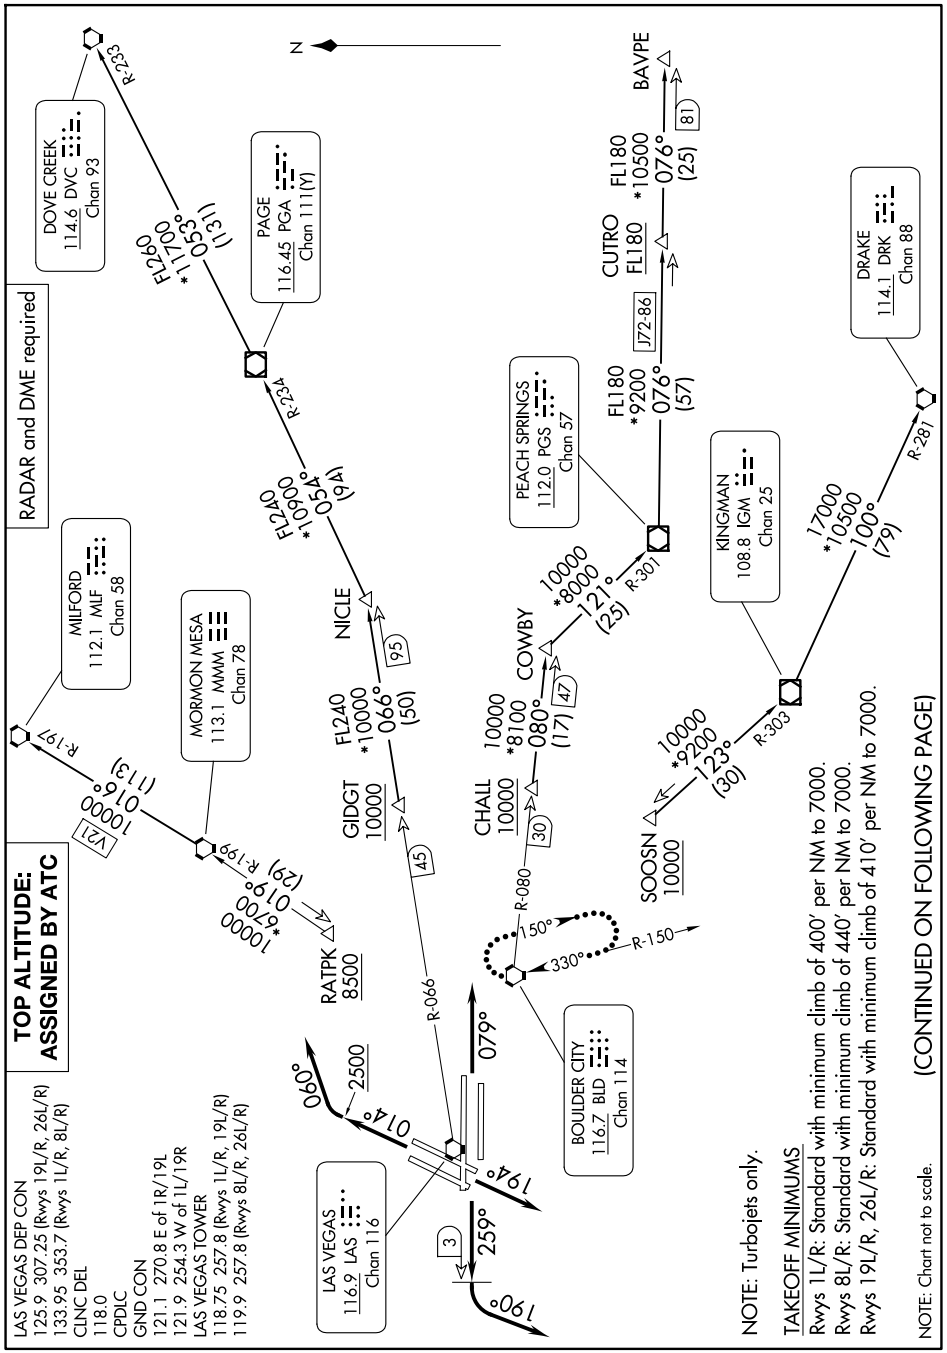
RADAR and DME required
TOP ALTITUDE: ASSIGNED BY ATC
LAS VEGAS DEP CON
125.9 307.25 (Rwys 19L/R, 26L/R)
133.95 353.7 (Rwys 1L/R, 8L/R)
CLNC DEL
118.0
CPDLC
GND CON
121.1 270.8 E of 1R/19L
121.9 254.3 W of 1L/19R
LAS VEGAS TOWER
118.75 257.8 (Rwys 1L/R, 19L/R)
119.9 257.8 (Rwys 8L/R, 26L/R)
N
DOVE CREEK
114.6 DVC
Chan 93
R-233
FL260
*17000
053°
(131)
PAGE
116.45 PGA
Chan 111(Y)
R-234
FL240
*10900
050°
(96)
NICLE
95
FL240
*10000
066°
(50)
GIDGT
10000
45
R-066
MILFORD
112.1 MLF
Chan 58
R-197
10000
016°
(113)
V21
MORMON MESA
113.1 MMM
Chan 78
R-199
10000
*6700
019°
(29)
RATPK
8500
090°
2500
014°
LAS VEGAS
116.9 LAS
Chan 116
3
259°
190°
194°
079°
PEACH SPRINGS
112.0 PGS
Chan 57
10000
*8000
121°
(25)
R-301
COWBY
47
10000
*8100
080°
(17)
CHALL
10000
30
R-080
150°
330°
R-150
BOULDER CITY
116.7 BLD
Chan 114
SOOSN
10000
10000
*9200
123°
(30)
R-303
KINGMAN
108.8 IGM
Chan 25
FL180
*9200
076°
(57)
J72-86
CUTRO
FL180
FL180
*10500
076°
(25)
81
BAVPE
DRAKE
114.1 DRK
Chan 88
R-281
17000
*10500
100°
(79)
NOTE: Turbojets only.
TAKEOFF MINIMUMS
Rwys 1L/R: Standard with minimum climb of 400′ per NM to 7000.
Rwys 8L/R: Standard with minimum climb of 440′ per NM to 7000.
Rwys 19L/R, 26L/R: Standard with minimum climb of 410′ per NM to 7000.
NOTE: Chart not to scale.
(CONTINUED ON FOLLOWING PAGE)