

LOC/DME I-LAS	APP CRS	Rwy Ldg	26R	26L
110.3	259°	TDZE	12638	10526
Chan 40		Apt Elev	2067	2069
			2181	2181

ILS Z or LOC Z RWY 26R
HARRY REID INTL (LAS)


⚠ For inop ALS, increase S-ILS-26R all Cats visibility to ½ SM, S-LOC-26R Cat E visibility to 1 ¾ SM. Inop table does not apply to sidestep 26L.

MALS Rwy 26R


MALSF Rwy 26L

MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 on heading 079° and on BLD R-287 to BLD VORTAC and hold, continue climb-in-hold to 6000.

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

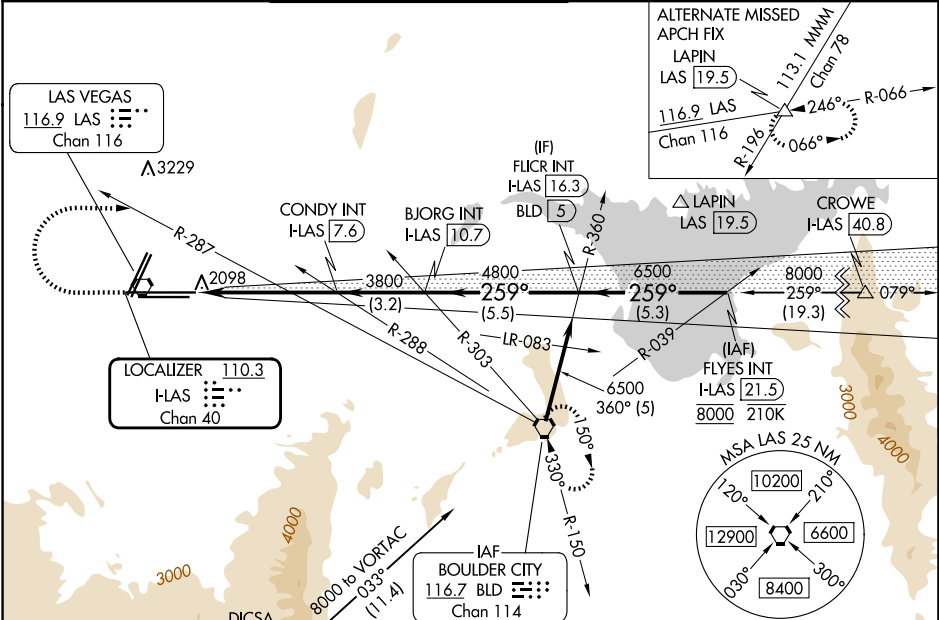

ELEV 2181	TDZE 26R 2067
	TDZE 26L 2069

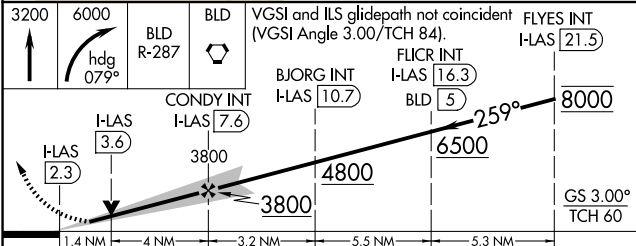

CATEGORY	A	B	C	D	E
S-ILS 26R	2334-¾ 267 (200-¾)				
S-LOC 26R	2560-¾ 493 (400-¾)	2560-1⅛ 493 (400-1⅛)			
SIDESTEP 26L	2560-1 491 (400-1)	2560-1½ 491 (400-½)	2560-2 491 (400-2)		
CIRCLING	3020-1¼ 839 (900-1¼)	3060-1¼ 879 (900-1¼)	3100-2¾ 919 (1000-2¾)	3540-3 1359 (1400-3)	

